

Case No. 59013

04/07/00  
JCS53 U.S. PTO

ASSISTANT COMMISSIONER FOR PATENTS  
WASHINGTON, DC 20231

CERTIFICATE OF MAILING BY "EXPRESS MAIL" *R*

"EXPRESS MAIL" MAILING LABEL NUMBER EL54793838505

DATE OF DEPOSIT April, 7, 2000

I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING DEPOSITED WITH THE UNITED STATES POSTAL SERVICE "EXPRESS MAIL POST OFFICE TO ADDRESSEE" SERVICE UNDER 37 CFR 1.10 ON THE DATE INDICATED ABOVE AND IS ADDRESSED TO THE COMMISSIONER OF PATENTS AND TRADEMARKS, WASHINGTON, D.C. 20231

Eric Link  
(TYPED OR PRINTED NAME OF PERSON MAILING PAPER OR FEE)

Transmitted herewith for filing is the patent application of:

Eric Link  
(SIGNATURE OF PERSON MAILING PAPER OR FEE)

Inventors: **Jeffrey A. FRISCO; Michael KEEN**

For: **AIRCRAFT IN-FLIGHT ENTERTAINMENT SYSTEM WITH SOFT FAIL AND FLIGHT INFORMATION FEATURES AND ASSOCIATED METHODS**

**Enclosed are:**

- ☒ Patent Application: 45 pages, 47 claims.
- ☒ 18 Sheets of drawings.
- ☐ An assignment of the invention to \_\_\_\_\_.
- ☐ A certified copy of a \_\_\_\_\_ application.
- ☐ A Preliminary Amendment.
- ☐ Citation Under 37 CFR 1.97 and PTO-1449.
- ☐ Submission of Proposed Drawing Modification.
- ☐ A verified statement to establish small entity status under 37 CFR §§1.19 and 1.27.

The Declaration and Filing Fee are **NOT ENCLOSED**.

- ☒ Name, Address and Citizenship of Inventor(s) is as follows:

**Jeffrey A FRISCO, 1583 Breezewood Lane NW, Melbourne, FL 32907**  
**Citizen of U.S.**

**Michael KEEN, 766 Aachen Avenue NW, Melbourne, FL 32907**  
**Citizen of U.S.**

**PLEASE ADDRESS ALL CORRESPONDENCE TO ATTORNEY OF RECORD**

**CHRISTOPHER F. REGAN**  
**Allen, Dyer, Doppelt, Milbrath & Gilchrist, P.A.**  
**P.O. Box 3791**  
**Orlando, FL 32802-3791**

Date: April 7, 2000

Christopher F. Regan  
**CHRISTOPHER F. REGAN**  
Reg. No. 34,906

57

**AIRCRAFT IN-FLIGHT ENTERTAINMENT  
SYSTEM WITH SOFT FAIL AND FLIGHT  
INFORMATION FEATURES AND ASSOCIATED METHODS**

**Field of the Invention**

The present invention relates to the field of aircraft systems, and, more particularly, to an aircraft in-flight entertainment system and associated  
5 methods.

**Background of the Invention**

Commercial aircraft carry millions of passengers each year. For relatively long  
10 international flights, wide-body aircraft are typically used. These aircraft include multiple passenger aisles and have considerably more space than typical so-called narrow-body aircraft. Narrow-body aircraft carry fewer passengers shorter distances, and include only a single  
15 aisle for passenger loading and unloading. Accordingly, the available space for ancillary equipment is somewhat limited on a narrow-body aircraft.

Wide-body aircraft may include full audio and  
20 video entertainment systems for passenger enjoyment during relatively long flights. Typical wide-body aircraft entertainment systems may include cabin displays, or individual seatback displays. Movies or other stored video programming is selectable by the

passenger, and payment is typically made via a credit card reader at the seat. For example, U.S. Patent No. 5,568,484 to Margis discloses a passenger entertainment system with an integrated telecommunications system. A  
5 magnetic stripe credit card reader is provided at the telephone handset and processing to approve the credit card is performed by a cabin telecommunications unit.

In addition to prerecorded video entertainment, other systems have been disclosed  
10 including a satellite receiver for live television broadcasts, such as disclosed in French Patent No. 2,652,701 and U.S. Patent No. 5,790,175 to Sklar et al. The Sklar et al. patent also discloses such a system including an antenna and its associated steering  
15 control for receiving both RHCP and LHCP signals from direct broadcast satellite (DBS) services. The video signals for the various channels are then routed to a conventional video and audio distribution system on the aircraft which distributes live television programming  
20 to the passengers.

In addition, U.S. Patent No. 5,801,751 also to Sklar et al. addresses the problem of an aircraft being outside of the range of satellites, by storing the programming for delayed playback, and additionally  
25 discloses two embodiments -- a full system for each passenger and a single channel system for the overhead monitors for a group of passengers. The patent also discloses steering the antenna so that it is locked onto RF signals transmitted by the satellite. The  
30 antenna steering may be based upon the aircraft navigation system or a GPS receiver along with inertial reference signals.

A typical aircraft entertainment system for displaying TV broadcasts may include one or more  
35 satellite antennas, headend electronic equipment at a

central location in the aircraft, a cable distribution network extending throughout the passenger cabin, and electronic demodulator and distribution modules spaced within the cabin for different groups of seats. Many  
5 systems require signal attenuators or amplifiers at predetermined distances along the cable distribution network. In addition, each passenger seat may include an armrest control and seatback display. In other words, such systems may be relatively heavy and consume  
10 valuable space on the aircraft. Space and weight are especially difficult constraints for a narrow-body aircraft.

Published European patent application no. 557,058, for example, discloses a video and audio  
15 distribution system for an aircraft wherein the analog video signals are modulated upon individual RF carriers in a relatively low frequency range, and digitized audio signals, including digitized data, are modulated upon an RF carrier of a higher frequency to avoid  
20 interference with the modulated video RF carriers. All of the video and audio signals are carried by coaxial cables to area distribution boxes. Each area distribution box, in turn, provides individual outputs to its own group of floor distribution boxes. Each  
25 output line from a floor distribution box is connected to a single line of video seat electronic boxes (VSEB). The VSEB may service up to five or more individual seats. At each seat there is a passenger control unit and a seat display unit. Each passenger control unit  
30 includes a set of channel select buttons and a pair of audio headset jacks. Each display unit includes a video tuner that receives video signals from the VSEB and controls a video display.

A typical cable distribution network within  
35 an aircraft may be somewhat similar to a conventional

coaxial cable TV system. For example, U.S. Patent No. 5,214,505 to Rabowsky et al. discloses an aircraft video distribution system including amplifiers, taps and splitters positioned at mutually distant stations and with some of the stations being interconnected by relatively long lengths of coaxial cable. A variable equalizer is provided at points in the distribution system to account for different cable losses at different frequencies. The patent also discloses microprocessor-controlled monitoring and adjustment of various amplifiers to control tilt, that is, to provide frequency slope compensation. Several stations communicate with one another by a separate communication cable or service path independent of the RF coaxial cable. The patent further discloses maintenance features including reporting the nature and location of any failure or degradation of signals to a central location for diagnostic purposes.

One difficulty with conventional DBS in-flight entertainment systems is that a degraded image may be generated based upon a weak receive signal, for example. Of course, a severely degraded image may cause some passengers to question the proper operation of the aircraft. Some DBS systems, may generate a default text message which is also likely to be similarly disconcerting to an aircraft passenger. Yet another shortcoming of some conventional DBS in-flight systems, is that flight specific information is not conveyed to the passenger.

30

#### Summary of the Invention

In view of the foregoing background, it is therefore an object of the present invention to provide an aircraft in-flight entertainment system and related

methods avoiding undesired images from passenger video displays.

It is another object of the invention to provide such a system and related method providing  
5 useful and desired information to the passengers along with video channels from a satellite TV receiver.

These and other objects, features and advantages in accordance with the present invention are provided in one embodiment by an aircraft in-flight  
10 entertainment system comprising a satellite TV receiver, at least one passenger video display connected to the satellite TV receiver, and a processor connected to the satellite TV receiver for determining an undesired condition and for generating a substitute  
15 image on the passenger video display rather than permit display of an undesired image which would otherwise be produced. The satellite TV receiver may comprise a direct broadcast satellite (DBS) receiver. The undesired condition may relate to a weak or marginal  
20 received signal strength condition, or the undesired condition may relate to a component malfunction. In either case, the processor could determine the weak signal or component malfunction. The system may include a storage device connected to the processor for  
25 storing the substitute image.

For example, the undesired image could be a degraded program image which may be disconcerting to the passenger. Alternately, the undesired image could default text message image, such as "searching for  
30 satellite" which could also be disconcerting to an air traveler.

The satellite TV receiver may generate a plurality of individual video channels, and the processor may determine the undesired condition for  
35 each of the individual video channels. Alternately,

the processor may determine the undesired condition for the plurality of video channels.

The at least one passenger video display may comprise a plurality of passenger seatback video  
5 displays. In addition, the system may also include signal distribution devices, and a cable network connecting the satellite TV receiver to the signal distribution devices, and connecting the signal distribution devices to the passenger video displays.  
10 The system is particularly advantageous for a single-aisle narrow-body aircraft where cost effectiveness and low weight are especially important.

A related method aspect of the invention is for operating an aircraft in-flight entertainment  
15 system comprising a satellite TV receiver, and at least one passenger video display connected to the satellite TV receiver. The method preferably comprises determining an undesired condition, and generating a substitute image on the at least one passenger video  
20 display rather than permit display of an undesired image which would otherwise be produced. The undesired condition may be a weak received signal and/or a component malfunction.

Another class of embodiments of the invention  
25 are directed to providing useful information to the passengers. More particularly, the invention is also directed to an aircraft in-flight entertainment system comprising a satellite TV receiver for generating programming channels, and a moving map image generator  
30 for generating a flight information channel including a moving representation of the aircraft position on a map image. The satellite TV receiver may comprise direct broadcast satellite (DBS) receiver. The system also preferably includes at least one passenger video  
35 display connected to the satellite TV receiver and the

moving map image generator, and at least one passenger control unit associated with a respective passenger video display for permitting passenger selection of one of the programming channels and flight information  
5 channel for display on the respective passenger video display. Accordingly, the flight information channel is integrated in with the satellite TV programming channels for the passenger's convenience and information.

10 The moving map image generator may include a processor for determining an aircraft position during flight. The processor may cooperate with a global positioning system (GPS) receiver for determining position. This GPS receiver may also provide signals  
15 for steering a steerable antenna connected to the satellite TV receiver. The processor may further determine at least one of an aircraft direction, aircraft speed and aircraft altitude for display with the moving map image. This information is also  
20 generally useful to the passengers.

The at least one passenger video display may comprise a plurality of passenger seatback video displays. In addition, the aircraft in-flight entertainment system may further comprise a plurality  
25 of signal distribution devices, and a cable network connecting the satellite TV receiver and the moving map generator to the signal distribution devices, and connecting the signal distribution devices to the passenger video displays. These embodiments of the  
30 invention are also particularly advantageous for a narrow-body aircraft having a single longitudinal passenger aisle.

A related method aspect of the invention is for operating an aircraft in-flight entertainment  
35 system comprising a satellite TV receiver for



generating a plurality of video programming channels,  
at least one passenger video display connected to the  
satellite TV receiver, and at least one passenger  
control unit associated with a respective passenger  
5 video display for permitting passenger selection of  
programming channels for display on the respective  
passenger video display. The method may include  
generating a flight information channel including a  
moving representation of the aircraft position on a map  
10 image, and permitting passenger selection of the flight  
information channel also using the at least one  
passenger control unit.

#### **Brief Description of the Drawings**

15 FIG. 1 is a schematic diagram of the overall  
components of the aircraft in-flight entertainment  
system in accordance with the present invention.

FIGS. 2A and 2B are a more detailed schematic  
block diagram of an embodiment of the in-flight  
20 entertainment system in accordance with the present  
invention.

FIG. 3 is a schematic rear view of a  
seatgroup of the in-flight entertainment system of the  
invention.

25 FIG. 4 is a flowchart for a first method  
aspect relating to the in-flight entertainment system  
of the invention.

FIG. 5 is a flowchart for a second method  
aspect relating to the in-flight entertainment system  
30 of the invention.

FIG. 6 is a more detailed schematic block  
diagram of a first embodiment of an antenna-related  
portion of the in-flight entertainment system of the  
invention.

FIG. 7 is a side elevational view of the antenna mounted on the aircraft of the in-flight entertainment system of the invention.

FIG. 8 is a more detailed schematic block  
5 diagram of a second embodiment of an antenna-related portion of the in-flight entertainment system of the invention.

FIGS. 9-11 are simulated control panel  
displays for the in-flight entertainment system of the  
10 invention.

FIG. 12 is a schematic diagram of a portion  
of the in-flight entertainment system of the invention  
illustrating a soft-fail feature according to a first  
embodiment.

FIG. 13 is a schematic diagram of a portion  
15 of the in-flight entertainment system of the invention  
illustrating a soft-fail feature according to a second  
embodiment.

FIG. 14 is a schematic diagram of a portion  
20 of the in-flight entertainment system of the invention  
illustrating a moving map feature according to a first  
embodiment.

FIG. 15 is a schematic diagram of a portion  
of the in-flight entertainment system of the invention  
25 illustrating a moving map feature according to a second  
embodiment.

FIG. 16 is a flowchart for a method aspect of  
the in-flight entertainment system relating to payment  
and initiation of service in accordance with the  
30 invention.

FIG. 17 is a schematic block diagram of the  
portion of the in-flight entertainment system relating  
to initiation and payment in accordance with the  
invention.

**Detailed Description of the Preferred Embodiments**

The present invention will be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the  
5 invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will  
10 fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout, and prime notation is used to indicate similar elements in alternate embodiments.

The major components of an in-flight  
15 entertainment system **30** in accordance with the present invention are initially described with reference to FIGS. 1 through 3. The system **30** receives television and/or audio broadcast signals via one or more geostationary satellites **33**. The geostationary  
20 satellite **33** may be fed programming channels from a terrestrial station **34** as will be appreciated by those skilled in the art.

The in-flight entertainment system **30** includes an antenna system **35** to be mounted on the  
25 fuselage **32** of the aircraft **31**. In addition, the system **30** also includes one or more multi-channel receiver modulators (MRMs) **40**, a cable distribution network **41**, a plurality of seat electronic boxes (SEBs) **45** spaced about the aircraft cabin, and video display  
30 units (VDUs) **47** for the passengers and which are connected to the SEBs. In the illustrated embodiment, the system **30** receives, distributes, and decodes the DBS transmissions from the DBS satellite **33**. In other embodiments, the system **30** may receive video or TV

signals from other classes of satellites as will be readily appreciated by those skilled in the art.

The antenna system **35** delivers DBS signals to the MRMs **40** for processing. For example, each MRM **40**  
5 may include twelve DBS receivers and twelve video/audio RF modulators. The twelve receivers recover the digitally encoded multiplexed data for twelve television programs as will be appreciated by those skilled in the art.

10 As shown in the more detailed schematic diagram of FIGS. 2A and 2B, an audio video modulator (AVM) **50** is connected to the MRMs **40**, as well as a number of other inputs and outputs. The AVM **50**  
15 illustratively receives inputs from an external camera **52**, as well as one or more other video sources **54**, such as videotape sources, and receives signal inputs from one or more audio sources **56** which may also be prerecorded, for example. A PA keyline input and PA audio input are provided for passenger address and  
20 video address override. Audio for any receiver along with an associated keyline are provided as outputs from the MRM so that the audio may be broadcast over the cabin speaker system, for example, as will also be appreciated by those skilled in the art. In the  
25 illustrated embodiment, a control panel **51** is provided as part of the AVM **50**. The control panel **51** not only permits control of the system, but also displays pertinent system information and permits various diagnostic or maintenance activities to be quickly and  
30 easily performed.

The AVM **50** is also illustratively coupled to a ground data link radio transceiver **57**, such as for permitting downloading or uploading of data or programming information. The AVM **50** is also

illustratively interfaced to an air-to-ground telephone system **58** as will be appreciated by those skilled in the art.

The AVM **50** illustratively generates a number  
5 of NTSC video outputs which may be fed to one or more retractable monitors **61** spaced throughout the cabin. Power is preferably provided by the aircraft 400 Hz AC power supply as will also be appreciated by those skilled in the art. Of course, in some embodiments,  
10 the retractable monitors may not be needed.

The MRMs **40** may perform system control, and status monitoring. An RF distribution assembly (RDA) **62** can be provided to combine signals from a number of MRMs, such as four, for example. The RDA **62** combines  
15 the MRM RF outputs to create a single RF signal comprising up to 48 audio/video channels, for example. The RDA **62** amplifies and distributes the composite RF signal to a predetermined number of zone cable outputs. Eight zones are typical for a typical narrow-body  
20 single-aisle aircraft **31**. Depending on the aircraft, not all eight outputs may be used. Each cable will serve a zone of seatgroups **65** in the passenger cabin.

Referring now more specifically to the lower portion of FIG. 2B and also to FIG. 3, distribution of  
25 the RF signals and display of video to the passengers is now further described. Each zone cable **41** feeds the RF signal to a group of contiguous seatgroups **65** along either the right or lefthand side of the passenger aisle. In the illustrated embodiment, the seatgroup **65**  
30 includes three side-by-side seats **66**, although this number may also be two for other types of conventional narrow-body aircraft.

The distribution cables **41** are connected to the first SEB **45** in each respective right or left zone.

The other SEBs **45** are daisy-chained together with seat-to-seat cables. The zone feed, and seat-to-seat cables preferably comprise an RF audio-video coaxial cable, a 400 cycle power cable, and RS 485 data wiring.

5           For each seat **66** in the group **65**, the SEB **45** tunes to and demodulates one of the RF modulated audio/video channels. The audio and video are output to the passenger video display units (VDUs) **68** and headphones **70**, respectively. The tuner channels are  
10 under control of the passenger control unit (PCU) **71**, typically mounted in the armrest of the seat **66**, and which also carries a volume control.

Each VDU **68** may be a flat panel color display mounted in the seatback. The VDU **68** may also be  
15 mounted in the aircraft bulkhead in other configurations as will be appreciated by those skilled in the art. The VDU **68** will also typically include associated therewith a user payment card reader **72**. The payment card reader **72** may be a credit card reader, for  
20 example, of the type that reads magnetically encoded information from a stripe carried by the card as the user swipes the card through a slot in the reader as will be appreciated by those skilled in the art. In some embodiments, the credit card data may be processed  
25 on the aircraft to make certain processing decisions relating to validity, such as whether the card is expired, for example. As described in greater detail below, the payment card reader **72** may also be used as the single input required to activate the system for  
30 enhanced user convenience.

Having now generally described the major components of the in-flight entertainment system **30** and their overall operation, the description now is directed to several important features and capabilities

of the system in greater detail. One such feature relates to flexibility or upgradability of the system as may be highly desirable for many airline carriers. In particular, the system **30** is relatively compact and  
5 relatively inexpensive so that it can be used on narrow-body aircraft **31**, that is, single-aisle aircraft. Such narrow-body aircraft **31** are in sharp contrast to wide-body aircraft typically used on longer overseas flights and which can typically carry greater  
10 volumes and weight. The narrow-body aircraft **31** are commonly used on shorter domestic flights

The system **30**, for example, can be first installed to provide only audio. In addition, the first class passengers may be equipped with seat back  
15 VDUs **68**, while the coach section includes only aisle mounted video screens. The important aspect that permits upgradability is that the full cable distribution system is installed initially to thereby have the capacity to handle the upgrades. In other  
20 words, the present invention permits upgrading and provides reconfiguration options to the air carrier for an in-flight entertainment system and while reducing downtime for such changes.

The cable distribution system is modeled  
25 after a conventional ground based cable TV system in terms of signal modulation, cabling, drops, etc. Certain changes are made to allocate the available channels, such as forty-eight, so as not to cause potential interference problems with other equipment  
30 aboard the aircraft **31** as will be appreciated by those skilled in the art. In addition, there are basically no active components along the cable distribution path that may fail, for example. The cable distribution system also includes zones of seatgroups **66**. The zones

provide greater robustness in the event of a failure. The zones can also be added, such as to provide full service throughout the cabin.

Referring now additionally to the flow chart of FIG. 4, a method for installing and operating an aircraft in-flight entertainment system in accordance with the invention is now described. After the start (Block 80), the method preferably comprises installing at least one entertainment source on the aircraft at Block 82. The entertainment source may include a satellite TV source, such as provided by the DBS antenna system 35 and MRMs 40 described above. The method at Block 84 also preferably includes installing a plurality of spaced apart signal distribution devices, each generating audio signals for at least one passenger in an audio-only mode, and generating audio and video signals to at least one passenger in an audio/video mode. These devices may be the SEBs 45 described above as will be readily appreciated by those skilled in the art. The SEBs 45 include the capability for both audio and video when initially installed to thereby provide the flexibility for upgrading.

At Block 86 the cable network is installed on the aircraft 31 connecting the at least one entertainment source to the signal distribution devices. In other words, the MRMs 40 are connected to the SEBs 45 in the various equipped zones throughout the aircraft 31. Operating the aircraft in-flight entertainment system 30 at Block 88 with at least one predetermined signal distribution device in the audio-only mode, permits initial weight and cost savings since the VDUs 68, for example, may not need to be initially installed for all passengers as will be appreciated by those skilled in the art. For example,



a carrier may initially decide to equip first class passengers with both video and audio entertainment options, while coach passengers are initially limited to audio only. Hence, the cost of the VDUs **68** for the  
5 coach passengers is initially deferred.

Installing the cabling **41** and SEBs **45** at one time will result in substantial time and labor savings as compared to a piecemeal approach to adding these components at a later time as needed. Accordingly,  
10 should an upgrade be desired at Block **90**, this may be readily accomplished by connecting at least one VDU **68** to the at least one predetermined signal distribution device, or SEB **45**, to operate in the audio/video mode and while leaving the cable network unchanged (Block  
15 **92**). Accordingly, the downtime experienced by air carrier is greatly reduced over other systems which require significant recabling and other difficult equipment installation operations for upgrading. The method is particularly advantageous for a single-aisle  
20 narrow-body aircraft **31** as shown in the illustrated embodiment, where cost effectiveness and low weight are especially important.

As noted above, the entertainment source may preferably comprise a DBS receiver. The step of later  
25 upgrading may further comprise leaving the at least one predetermined signal distribution device, such as the SEB **45**, unchanged. The step of installing the cable network **41** may comprise installing coaxial cable, power cable and data cable throughout the aircraft as also  
30 described above. The step of later upgrading may include installing at least one VDU **68** in the aircraft **31**, such as on backs of passenger seats **66**.

Of course, the aircraft **31** in some embodiments may include different seating classes as

will be appreciated by those skilled in the art. Accordingly, another important aspect of the invention relates to offering different entertainment services based upon the different seating classes at Block **94**.

5 In addition, the different seating classes may be reconfigurable, and the step of reconfiguring offered entertainment services may then be based upon reconfiguring of the seating classes. The offering of different entertainment services may comprise offering  
10 different packages of television channels, for example. In addition, the step of offering different entertainment services may comprise offering audio-only and audio/video modes of operation based upon seating classes.

15 Yet another aspect of the invention relates to a method for operating an aircraft in-flight entertainment system **30** for an aircraft **31** when seating classes are reconfigured. Continuing down the flowchart of FIG. 4, this aspect of the method  
20 preferably comprises determining whether a reconfiguration is desired at Block **96**, and reconfiguring offered entertainment services based upon reconfiguring of the seating classes at Block **98** before stopping at Block **100**. For example, the step of  
25 offering different entertainment services may include offering different packages of television channels. Alternately, the step of offering different entertainment services may comprise offering audio-only and audio/video modes of operation based upon seating  
30 classes. In either case, the reconfiguring can be readily accomplished using the existing cable distribution network **41** and distribution devices, that is, SEBs **45** as will be appreciated by those skilled in the art.

The various upgrading and reconfiguring aspects of the in-flight entertainment system **30** can be performed in a reverse sequence than that illustrated in FIG. 4 and described above. Of course, the upgrade  
5 steps may be practiced without the later reconfiguring steps as will be appreciated by those skilled in the art.

To further illustrate the method aspects, the flowchart of FIG. 5 is directed to the subset of  
10 offering different services and later reconfiguring those services based upon reconfiguring seating. More particularly, from the start (Block **110**), the in-flight entertainment system **30** is installed and operated (Block **114**) offering different services based upon  
15 seating class, such as offering video to first class passengers, and offering only audio to non-first class passengers. If it is determined that the seating should be reconfigured at Block **116**, then the in-flight entertainment system **30** can be readily reconfigured at  
20 Block **118** before stopping (Block **120**).

Turning now additionally to FIGS. 6 and 7, advantages and features of the antenna system **35** are now described in greater detail. The antenna system **35** includes an antenna **136** which may be positioned or  
25 steered by one or more antenna positioners **138** as will be appreciated by those skilled in the art. In addition, one or more position encoders **141** may also be associated with the antenna **136** to steer the antenna to thereby track the DBS satellite or satellites **33**. Of  
30 course, a positioning motor and associated encoder may be provided together within a common housing, as will also be appreciated by those skilled in the art. In accordance with one significant advantage of the present invention, the antenna **136** may be steered using

received signals in the relatively wide bandwidth of at least one DBS transponder.

More particularly, the antenna system **35** includes an antenna steering controller **142**, which, in turn, comprises the illustrated full transponder bandwidth received signal detector **143**. This detector **143** generates a received signal strength feedback signal based upon signals received from the full bandwidth of a DBS transponder rather than a single demodulated programming channel, for example. Of course, in other embodiments the same principles can be employed for other classes or types of satellites than the DBS satellites described herein by way of example.

In the illustrated embodiment, the detector **143** is coupled to the output of the illustrated intermediate frequency interface (IFI) **146** which converts the received signals to one or more intermediate frequencies for further processing by the MRMs **40** as described above and as will be readily appreciated by those skilled in the art. In other embodiments, signal processing circuitry, other than that in the IFI **146** may also be used to couple the received signal from one or more full satellite transponders to the received signal strength detector **143** as will also be appreciated by those skilled in the art.

A processor **145** is illustratively connected to the received signal strength detector **143** for controlling the antenna steering positioners **138** during aircraft flight and based upon the received signal strength feedback signal. Accordingly, tracking of the satellite or satellites **33** is enhanced and signal service reliability is also enhanced.

The antenna steering controller **142** may further comprise at least one inertial rate sensor **148** as shown in the illustrated embodiment, such as for roll, pitch or yaw as will be appreciated by those skilled in the art. The rate sensor **148** may be provided by one or more solid state gyroscopes, for example. The processor **145** may calibrate the rate sensor **148** based upon the received signal strength feedback signal.

10 The illustrated antenna system **35** also includes a global positioning system (GPS) antenna **151** to be carried by the aircraft fuselage **32**. This may preferably be provided as part of an antenna assembly package to be mounted on the upper portion of the  
15 fuselage. The antenna assembly may also include a suitable radome, not shown, as will be appreciated by those skilled in the art. The antenna steering controller **142** also illustratively includes a GPS receiver **152** connected to the processor **145**. The  
20 processor **145** may further calibrate the rate sensor **148** based upon signals from the GPS receiver as will be appreciated by those skilled in the art.

As will also be appreciated by those skilled in the art, the processor **145** may be a commercially  
25 available microprocessor operating under stored program control. Alternately, discrete logic and other signal processing circuits may be used for the processor **145**. This is also the case for the other portions or circuit components described as a processor herein as will be  
30 appreciated by those skilled in the art. The advantageous feature of this aspect of the invention is that the full or substantially full bandwidth of the satellite transponder signal is processed for determining the received signal strength, and this

provides greater reliability and accuracy for steering the antenna **136**.

Another advantage of the antenna system **35** is that it may operate independently of the aircraft navigation system **153** which is schematically illustrated in the lower righthand portion of FIG. 6. In other words, the aircraft **31** may include an aircraft navigation system **153**, and the antenna steering controller **142** may operate independently of this aircraft navigation system. Thus, the antenna steering may operate faster and without potential unwanted effects on the aircraft navigation system **153** as will be appreciated by those skilled in the art. In addition, the antenna system **35** is also particularly advantageous for a single-aisle narrow-body aircraft **31** where cost effectiveness and low weight are especially important.

Turning now additionally to FIG. 8, another embodiment of the antenna system **35'** is now described which includes yet further advantageous features. This embodiment is directed to functioning in conjunction with the three essentially collocated geostationary satellites for the DIRECTV® DBS service, although the invention is applicable in other situations as well. For example, the DIRECTV® satellites may be positioned above the earth at 101 degrees west longitude and spaced 0.5 degrees from each other. Of course, these DIRECTV® satellites may also be moved from these example locations, and more than three satellites may be so collocated. Considered in somewhat broader terms, these features of the invention are directed to two or more essentially collocated geostationary satellites. Different circular polarizations are

implemented for reused frequencies as will be appreciated by those skilled in the art.

In this illustrated embodiment, the antenna **136'** is a multi-beam antenna having an antenna boresight (indicated by reference **B**), and also defining right-hand circularly polarized (**RHCP**) and left-hand circularly polarized (**LHCP**) beams (designated **RHCP** and **LHCP** in FIG. 8) which are offset from the antenna boresight. Moreover, the beams **RHCP**, **LHCP** are offset from one another by a beam offset angle  $\alpha$  which is greatly exaggerated in the figure for clarity. This beam offset angle  $\alpha$  is less than the angle  $\beta$  defined by the spacing defined by the satellites **33a**, **33b**. The transponder or satellite spacing angle  $\beta$  is about 0.5 degrees, and the beam offset angle  $\alpha$  is preferably less than 0.5 degrees, and may be about 0.2 degrees, for example.

The beam offset angle provides a squinting effect and which allows the antenna **136'** to be made longer and thinner than would otherwise be required, and the resulting shape is highly desirable for aircraft mounting as will be appreciated by those skilled in the art. The squinting also allows the antenna to be constructed to have additional signal margin when operating in rain, for example, as will also be appreciated by those skilled in the art.

The multi-beam antenna **136'** may be readily constructed in a phased array form or in a mechanical form as will be appreciated by those skilled in the art without requiring further discussion herein. Aspects of similar antennas are disclosed in U.S. Patent Nos. 4,604,624 to Amitay et al.; 5,617,108 to Silinsky et al.; and 4,413,263 also to Amitay et al.; the entire

disclosures of which are incorporated herein by reference.

The processor **145'** preferably steers the antenna **136'** based upon received signals from at least one of the **RHCP** and **LHCP** beams which are processed via the IFI **146'** and input into respective received signal strength detectors **143a**, **143b** of the antenna steering controller **142'**. In one embodiment, the processor **145'** steers the multi-beam antenna **136'** based on a selected master one of the **RHCP** and **LHCP** beams and slaves the other beam therefrom.

In another embodiment, the processor **145'** steers the multi-beam antenna **136'** based on a predetermined contribution from each of the **RHCP** and **LHCP** beams. For example, the contribution may be the same for each beam. In other words, the steering or tracking may such as to average the received signal strengths from each beam as will be appreciated by those skilled in the art. As will also be appreciated by those skilled in the art, other fractions or percentages can also be used. Of course, the advantage of receiving signals from two different satellites **33a**, **33b** is that more programming channels may then be made available to the passengers.

The antenna system **35'** may also advantageously operate independent of the aircraft navigation system **153'**. The other elements of FIG. 8 are indicated by prime notation and are similar to those described above with respect to FIG. 6. Accordingly, these similar elements need no further discussion.

Another aspect of the invention relates to the inclusion of adaptive polarization techniques which may be used to avoid interference from other



satellites. In particular, low earth orbit satellites (LEOS) are planned which may periodically be in position to cause interference with the signal reception by the in-flight entertainment system **30**.

- 5 Adaptive polarization techniques would also be desirable should assigned orbital slots for satellites be moved closer together.

Accordingly, the processor **145'** may preferably be configured to perform adaptive  
10 polarization techniques to avoid or reduce the impact of such potential interference. Other adaptive polarization techniques may also be used. Suitable adaptive polarization techniques are disclosed, for example, in U.S. Patent Nos. 5,027,124 to Fitzsimmons  
15 et al; 5,649,318 to Lusignan; and 5,309,167 to Cluniat et al. The entire disclosures of each of these patents is incorporated herein by reference. Those of skill in the art will readily appreciate the implementation of such adaptive polarization techniques with the in-  
20 flight entertainment system **30** in accordance with the present invention without further discussion.

Other aspects and advantages of the in-flight entertainment system **30** of the present invention are now explained with reference to FIGS. 9-11. The system  
25 **30** advantageously incorporates a number of self-test or maintenance features. As will be appreciated by those skilled in the art, the maintenance costs to operate such a system **30** could be significantly greater than the original purchase price. Accordingly, the system  
30 **30** includes test and diagnostic routines to pinpoint defective equipment. In particular, the system **30** provides the graphical representation of the aircraft seating arrangement to indicate class of service,

equipment locations, and failures of any of the various components to aid in maintenance.

As shown in FIG. 9, the system **30** includes a control panel display **51**, and a processor **160** connected  
5 to the control panel display. The control panel display **51** and processor **160** may be part of the AVM **50** (FIG. 1), but could be part of one or more of the MRMs **40** (FIG. 1), or part of another monitoring device as will be appreciated by those skilled in the art. The  
10 control panel display **51** may be touch screen type display including designated touch screen input areas **163a-163d** to also accept user inputs as would also be appreciated by those skilled in the art.

More particularly, the processor **160**  
15 generates a seating layout image **170** of the aircraft on the control panel display **51** with locations of the signal distribution devices located on the seating layout image. These locations need not be exact, but should be sufficient to direct the service technician  
20 to the correct left or right side of the passenger aisle, and locate the seatgroup and/or seat location for the defective or failed component. In addition, the locations need not be constantly displayed; rather, the location of the component may only be displayed  
25 when service is required, for example.

The processor **160** also preferably generates information relating to operation of the signal distribution devices on the display. The signal distribution devices, for example, may comprise  
30 demodulators (SEBs **45**), modulators (MRMs **40**), or the video passenger displays (VDUs **68**), for example. Accordingly, a user or technician can readily determine a faulty component and identify its location in the aircraft.

As shown in the illustrated embodiment of FIG. 9, the representative information is a failed power supply module of the #4 SEB of zone 5. In FIG. 10, the information is for a failed #4 MRM. This information is illustratively displayed in text with an indicator pointing to the location of the device. In other embodiments, a flashing icon or change of color could be used to indicate the component or signal distribution device requiring service as will be appreciated by those skilled in the art.

This component mapping and service needed feature of the invention can be extended to other components of the system **30** as will be readily appreciated by those skilled in the art. For example, the processor **160** may further generate information relating to operation of the entertainment source, such as the DBS receiver, or its antenna as shown in FIG. 11. Again, the technician may be guided to the location of the failed component from the seat image layout **170**.

Returning again briefly to FIG. 9, another aspect of the invention relates to display of the correct seating layout **170** for the corresponding aircraft **31**. As shown, the display **51** may also include an aircraft-type field **171** which identifies the particular aircraft, such as an MD-80. The corresponding seating layout data can be downloaded to the memory **162** or the processor **160** by a suitable downloading device, such as the illustrated laptop computer **161**. In other embodiments, the processor **160** may be connected to a disk drive or other data downloading device to receive the seat layout data.

The seat layout data would also typically include the data for the corresponding locations of the devices installed as part of the in-flight

entertainment system **30** on the aircraft as will be appreciated by those skilled in the art. Accordingly, upgrades or changes in the system **30** configuration may thus be readily accommodated.

5           Another aspect of the invention relates to a soft failure mode and is explained with reference to FIGS. 12 and 13. A typical DBS system provides a default text message along the lines "searching for  
10   satellite" based upon a weak or missing signal from the satellite. Of course, an air traveler may become disconcerted by such a message, since such raises possible questions about the proper operation of the aircraft. In other systems, a weak received signal may cause the displayed image to become broken up, which  
15   may also be disconcerting to the air traveler.

          The system **30** as shown in FIG. 12 of the present invention includes a processor **175** which may detect the undesired condition in the form of a weak or absent received signal strength, and cause the  
20   passenger video display **68** to display a substitute image. More particularly, the processor **175** may be part of the AVM **50** as described above, could be part of another device, such as the MRM **40**, or could be a separate device.

25           The processor **175** illustratively includes a circuit or portion **176** for determining a weak received signal strength as will be appreciated by those skilled in the art. Suitable circuit constructions for the weak received signal strength determining portion or  
30   circuit **176** will be readily appreciated by those skilled in the art, and require no further discussion herein. The threshold for the weak received signal strength determining portion or circuit **176** can preferably be set so as to trigger the substitute image

before substantial degradation occurs, or before a text default message would otherwise be triggered, depending on the satellite service provider, as would be appreciated by those skilled in the art. In addition, 5 the substitute image could be triggered for a single programming channel upon a weakness or loss of only that single programming channel, or may be generated across the board for all programming channels as will be readily appreciated by those skilled in the art.

10 In the illustrated system **30** of FIG. 12, a substitute image storage device **178** is coupled to the processor **175**. This device **178** may be a digital storage device or a video tape player, for example, for causing the passenger video display **68** to show a 15 substitute image. For example, the image could be a text message, such as "LiveTV™ Service Temporarily Unavailable, Please Stand By". Of course, other similar messages or images are also contemplated by the invention, and which tend to be helpful to the 20 passenger in understanding a loss of programming service has occurred, but without raising unnecessary concern for the proper operation of the aircraft **31** to the passenger.

This concept of a soft failure mode, may also 25 be carried forward or applied to a component malfunction, for example. As shown in the system **30'** of FIG. 13, a component malfunctioning determining portion or circuit **177'** is added to the processor **175'** and can be used in combination with the weak received 30 signal strength determining portion **176'**. Of course, in other embodiments the malfunction determining circuit portion **177'** could be used by itself. Again, rather than have a disconcerting image appear on the passenger's video display **68**, a substitute image may be

provided. Those of skill in the art will appreciate that the weak received signal strength and component malfunction are representative of types of undesired conditions that the present system **30** may determine and  
5 provide a soft failure mode for.

Yet another advantageous feature of the invention is now explained with reference to FIG. 14. Some commercial aircraft provide, on a common cabin display or overhead monitor, a simulated image of the  
10 aircraft as it moves across a map between its origin and destination. The image may also include superimposed data, such as aircraft position, speed, heading, altitude, etc. as will be appreciated by those skilled in the art.

15 The in-flight entertainment system **30** of the invention determines or receives the aircraft position during flight and generates a moving map image **195** of the aircraft as a flight information video channel. Various flight parameters **196** can also be displayed  
20 along with the moving map image **195**. This flight information channel is offered along with the DBS programming channels during aircraft flight. In the illustrated embodiment, the passenger may select the flight information channel to be displayed on the  
25 passenger video display **68** using the passenger control unit (PCU) **71** which is typically mounted in the armrest as described above. In other words, the flight information channel is integrated along with the entertainment programming channels from the DBS system.

30 As shown in the illustrated embodiment, the moving map image **195** including other related text, such as the flight parameters **196**, may be generated by the illustrated AVM **50** and delivered through the signal distribution network **41** to the SEB **45**. Since the

antenna steering controller **142** (FIG. 6) includes circuitry for determining the aircraft position, etc., these devices may be used in some embodiments for generating the moving map image as will be appreciated  
5 by those skilled in the art.

For example, the GPS receiver **152** and its antenna **151** can be used to determine the aircraft position. The GPS receiver **152** is also used to steer the antenna in this embodiment. In other embodiments a  
10 separate GPS receiver may be used as will be appreciated by those skilled in the art. As will also be appreciated by those skilled in the art, the inertial rate sensor(s) **148** of the antenna steering controller **142** may also be used in some embodiments for  
15 generating flight information.

The processor **190** illustratively includes a parameter calculator **191** for calculating the various displayed flight parameters **196** from the position signal inputs as will be appreciated by those skilled  
20 in the art. For example, the parameter calculator **191** of the processor **190** may determine at least one of an aircraft direction, aircraft speed and aircraft altitude for display with the map image. Information may also be acquired from other aircraft systems, such  
25 as an altimeter **197**, for example, as will be appreciated by those skilled in the art. Also, the illustrated embodiment includes a map image storage device **192** which may include the various geographic maps used for the moving map image **195**.

30 Weather information may also be added for display along with the moving map image **195**. Further details on the generation and display of moving map images may be found in U.S. Patent Nos. 5,884,219 to Curtwright et al. and 5,992,882 to Simpson et al., the

entire disclosures of which are incorporated herein by reference.

Referring now briefly additionally to FIG. 15, another embodiment of the system **30** including the capability to display a flight information channel among the offered DBS or satellite TV channels is now described. In this embodiment, a moving map image generator **198'** is added as a separate device. In other words, in this embodiment, the flight channel signal is only carried through the distribution cable network **41'** and delivered via the SEB **45'** to the passenger video display **68**, and there is no interface to the components of the antenna steering controller **142** as in the embodiment described with reference to FIG. 14. In this embodiment, the moving map image generator **198'** may include its own position determining devices, such as a GPS receiver. Alternately, the moving map image generator **198'** may also receive the position data or even the image signal from a satellite or terrestrial transmitter.

Referring now additionally to the flowchart of FIG. 16 and the associated schematic block diagram of FIG. 17, another advantageous aspect of the invention relating to initiation and payment is now described. In particular, from the start (Block **200**), the system **30** may be first powered up and it performs its test and maintenance checks at Block **202** as will be appreciated by those skilled in the art. If the system components are determined to be operating correctly (Block **204**), the payment card readers **72** are monitored at Block **208**. If there is a failure, an alarm may be generated (Block **206**) so that corrective action may be taken.



The payment card **220** carried and presented by the passenger for payment may be a credit card, for example, and which includes a plastic substrate **221** and a magnetic stripe **222** thereon. The payment card **210**  
5 may also be a debit card, an automated teller machine (ATM) card, a frequent flyer card, or a complimentary card provided by the airline or the entertainment service provider for example. Other types of payment cards are also contemplated by the present invention as  
10 will be appreciated by those skilled in the art. The magnetic stripe **222** includes identification information thereon, and may also include expiration data encoded as will be appreciated by those skilled in the art. In the illustrated embodiment, the card reader **72** is a  
15 swipe-type reader, wherein the passenger simply swipes the correctly oriented card **220** through a receiving channel or slot.

Other types of card readers are also contemplated by the present invention as will be  
20 appreciated by those skilled in the art. For example, the system **30** can also be readily compatible with smart card technology. A smart card reader **225** is shown in the righthand portion of FIG. 17. As will be understood by those skilled in the art, the smart card  
25 **226** may include a plastic substrate **227** which carries an integrated circuit **228**. The integrated circuit **228** is read or communicated with to arrange for payment. The connection to the integrated circuit **228** may be through contacts **229** carried by the substrate **227**, or  
30 can be through short range wireless coupling as will be appreciated by those skilled in the art.

In the illustrated embodiment, the passenger video display **68** is connected to the SEB **45**, which in turn is connected, via the cable network **41**, to the

upstream DBS receiver as explained in detail above.  
The SEB **45** is also connected to the PCU **71** to permit  
user channel selection, volume control, etc. as will be  
appreciated by those skilled in the art. Passenger  
5 headphones **70** are also illustratively connected to the  
PCU **71**.

On a typical narrow-body aircraft **31**, the  
flight attendants are busy serving food and beverages  
during the relatively short duration of the flight.  
10 Accordingly, if the system **30** could only be manually  
initiated by the flight attendant after handling a cash  
exchange, such would be very impractical.

In accordance with the present invention,  
passenger and airline convenience are greatly enhanced  
15 based upon using the passenger's presentation of his  
payment card **220** to initiate service. In other words,  
returning again to the flowchart of FIG. 16, if a  
monitored card reader **72** is determined to have had a  
card **220** presented thereto (Block **210**), the card is  
20 read at Block **212**.

The processor **230** of the SEB **45** may perform  
certain basic validity checks on the read data as will  
be appreciated by those skilled in the art. For  
example, the processor **230** could provide a check of the  
25 validity of the expiration date of the payment card  
**220**. Other validity checks could also be performed,  
although contact with an authorization center would not  
typically be desired. For example, the payment card  
type could also be checked against a preprogrammed list  
30 of acceptable or authorized card types. For example,  
the identifying data may indicate whether the card is  
an American Express, VISA, Delta Airlines, or service  
provider complimentary card.

In addition, a data validity or numerical sequence test, such as a CRC test, could be performed on the data to determine its validity. For example, the data may include data necessary to the financial transaction, such as the account number, person's name, expiration date, etc. and additional data which causes the data collectively to pass a certain mathematical function test. In other words, if the card **220** was invalid as determined at Block **214**, service could be denied, and/or a certain number of retries could be permitted.

At Block **216**, if the optional validity check is successful, the selection and display of the programming channels is enabled before stopping (Block **218**). Moreover, in accordance with the invention, the only needed or required initiation input from the passenger is the presentation of a valid payment card **220**. The passenger need not enter personalized passwords or hard to remember codes. Accordingly, passenger convenience is greatly enhanced. Risk of revenue loss to the airline is also relatively small since the airline has a record of the assigned passenger for each seat. In addition, the service fee is relatively small.

Although the payment reader **72** has been described for a payment card **220**, the invention is also more broadly applicable to any user carried token which includes identifying data thereon for payment. Accordingly, many modifications and other embodiments of the invention will come to the mind of one skilled in the art having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. In addition, other features relating to the aircraft in-flight entertainment system

are disclosed in copending patent applications filed concurrently herewith and assigned to the assignee of the present invention and are entitled UPGRADABLE AIRCRAFT IN-FLIGHT ENTERTAINMENT SYSTEM AND ASSOCIATED  
5 UPGRADING METHODS, attorney work docket number 59001; AIRCRAFT IN-FLIGHT ENTERTAINMENT SYSTEM HAVING ENHANCED MAINTENANCE FEATURES AND ASSOCIATED METHODS, attorney work docket number 59009; AIRCRAFT IN-FLIGHT ENTERTAINMENT SYSTEM HAVING WIDEBAND ANTENNA STEERING  
10 AND ASSOCIATED METHODS, attorney work docket number 59010; AIRCRAFT IN-FLIGHT ENTERTAINMENT SYSTEM HAVING ENHANCED ANTENNA STEERING AND ASSOCIATED METHODS, attorney work docket number 59011; and AIRCRAFT IN-FLIGHT ENTERTAINMENT SYSTEM HAVING CONVENIENT SERVICE  
15 INITIATION AND ASSOCIATED METHODS, attorney work docket number 59014, the entire disclosures of which are incorporated herein in their entirety by reference. Therefore, it is to be understood that the invention is not to be limited to the specific embodiments  
20 disclosed, and that modifications and embodiments are intended to be included within the scope of the appended claims.

**THAT WHICH IS CLAIMED IS:**

1. An aircraft in-flight entertainment system comprising:
  - a satellite television (TV) receiver;
  - at least one passenger video display
  - 5 connected to said satellite TV receiver; and
  - a processor connected to said satellite TV receiver for determining an undesired condition and for generating responsive thereto a substitute image on said at least one passenger video display rather than
  - 10 permit display of an undesired image which would otherwise be produced.
2. An aircraft in-flight entertainment system according to Claim 1 wherein said satellite TV receiver comprises a direct broadcast satellite (DBS) receiver.
3. An aircraft in-flight entertainment system according to Claim 1 wherein the undesired condition is a weak received signal strength condition; and wherein said processor determines the weak received
- 5 signal strength condition.
4. An aircraft in-flight entertainment system according to Claim 1 wherein the undesired condition is a component malfunction; and wherein said processor determined the component malfunction.
5. An aircraft in-flight entertainment system according to Claim 1 wherein the undesired image is a degraded program image.

6. An aircraft in-flight entertainment system according to Claim 1 wherein the undesired image is default text message image.

7. An aircraft in-flight entertainment system according to Claim 1 further comprising a storage device connected to said processor for storing the substitute image.

8. An aircraft in-flight entertainment system according to Claim 1 wherein said satellite TV receiver generates a plurality of individual video channels; and wherein said processor determines the  
5 undesired condition for each of the individual video channels.

9. An aircraft in-flight entertainment system according to Claim 1 wherein said satellite TV receiver generates a plurality of video channels; and wherein said processor determines the undesired  
5 condition for the plurality of video channels.

10. An aircraft in-flight entertainment system according to Claim 1 wherein said at least one passenger video display comprises a plurality of passenger seatback video displays.

11. An aircraft in-flight entertainment system according to Claim 1 wherein said at least one passenger video display comprises a plurality of passenger video displays, and further comprising:  
5 a plurality of signal distribution devices;  
and

a cable network connecting said satellite TV receiver to said signal distribution devices, and

connecting said signal distribution devices to said  
10 passenger video displays.

12. An aircraft in-flight entertainment system according to Claim 1 wherein the aircraft is a narrow-body aircraft having a single passenger aisle.

13. An aircraft in-flight entertainment system comprising:

a satellite television (TV) receiver;  
a plurality of passenger video displays  
5 connected to said satellite TV receiver; and  
a processor connected to said satellite TV receiver for determining a weak received signal strength condition and for generating responsive thereto a substitute image on said passenger video  
10 displays prior to display of an undesired image which would otherwise be produced.

14. An aircraft in-flight entertainment system according to Claim 13 wherein said satellite TV receiver comprises a direct broadcast satellite (DBS) receiver.

15. An aircraft in-flight entertainment system according to Claim 13 wherein the undesired image is a degraded program image.

16. An aircraft in-flight entertainment system according to Claim 13 wherein the undesired image is default text image.

17. An aircraft in-flight entertainment system according to Claim 13 further comprising a

storage device connected to said processor for storing the substitute image.

18. An aircraft in-flight entertainment system according to Claim 13 wherein said satellite TV receiver generates a plurality of individual video channels; and wherein said processor determines the  
5 undesired condition for each of the individual video channels.

19. An aircraft in-flight entertainment system according to Claim 13 wherein said satellite TV receiver generates a plurality of video channels; and wherein said processor determines the undesired  
5 condition for the plurality of video channels.

20. An aircraft in-flight entertainment system according to Claim 13 further comprising:  
a plurality of signal distribution devices;  
and  
5 a cable network connecting said satellite TV receiver to said signal distribution devices, and connecting said signal distribution devices to said passenger video displays.

21. An aircraft in-flight entertainment system according to Claim 13 wherein the aircraft is a narrow-body aircraft having a single passenger aisle.

22. A method for operating an aircraft in-flight entertainment system comprising a satellite television (TV) receiver, and at least one passenger video display connected to the satellite television  
5 receiver, the method comprising:  
determining an undesired condition; and



generating a substitute image on the at least  
one passenger video display rather than permit display  
of an undesired image which would otherwise be  
10 produced.

23. A method according to Claim 22 wherein  
the satellite TV receiver comprises a direct broadcast  
satellite (DBS) receiver.

24. A method according to Claim 22 wherein  
the undesired condition is a weak received signal  
strength condition; and wherein determining comprises  
determining the weak received signal strength  
5 condition.

25. A method according to Claim 22 wherein  
the undesired condition is a component malfunction; and  
wherein determined comprises determining the component  
malfunction.

26. A method according to Claim 22 wherein  
the undesired image is a degraded program image.

27. A method according to Claim 22 wherein  
the undesired image is default text message image.

28. A method according to Claim 22 further  
comprising storing the substitute image.

29. A method according to Claim 22 wherein  
the satellite TV receiver generates a plurality of  
individual video channels; and wherein determining  
comprises determining the undesired condition for each  
5 of the individual video channels.

30. A method according to Claim 22 wherein the satellite TV receiver generates a plurality of video channels; and wherein determining comprises determining the undesired condition for the plurality  
5 of video channels.

31. A method according to Claim 22 wherein the aircraft is a narrow-body aircraft having a single passenger aisle.

32. An aircraft in-flight entertainment system comprising:

a satellite television (TV) receiver for generating a plurality of programming channels;

5 a moving map image generator for generating a flight information channel including a moving representation of the aircraft position on a map image; at least one passenger video display connected to said satellite TV receiver and said moving  
10 map image generator; and at least one passenger control unit associated with a respective passenger video display for permitting passenger selection of one of the programming channels and flight information channel for  
15 display on the respective passenger video display.

33. An aircraft in-flight entertainment system according to Claim 32 wherein said satellite TV receiver comprises a direct broadcast satellite (DBS) receiver.

34. An aircraft in-flight entertainment system according to Claim 32 wherein said moving map image generator comprises a processor for determining an aircraft position during flight.

35. An aircraft in-flight entertainment system according to Claim 34 further comprising a global positioning system (GPS) receiver connected to said processor for determining the aircraft position.

36. An aircraft in-flight entertainment system according to Claim 35 further comprising a steerable antenna connected to said satellite TV receiver; and wherein steering of said steerable  
5 antenna is based upon signals from said GPS receiver.

37. An aircraft in-flight entertainment system according to Claim 34 wherein said processor further determines at least one of an aircraft direction, aircraft speed and aircraft altitude for  
5 display with the moving map image.

38. An aircraft in-flight entertainment system according to Claim 32 wherein said at least one passenger video display comprises a plurality of passenger seatback video displays.

39. An aircraft in-flight entertainment system according to Claim 32 wherein said at least one passenger video display comprises a plurality of passenger video displays, and further comprising:  
5 a plurality of signal distribution devices;  
and

a cable network connecting said satellite TV receiver and said moving map image generator to said signal distribution devices, and connecting said signal  
10 distribution devices to said passenger video displays.

40. An aircraft in-flight entertainment system according to Claim 32 wherein the aircraft is a narrow-body aircraft having a single longitudinal passenger aisle.

41. A method for operating an aircraft in-flight entertainment system comprising a satellite television (TV) receiver for generating a plurality of video programming channels, at least one passenger  
5 video display connected to the satellite TV receiver, and at least one passenger control unit associated with a respective passenger video display for permitting passenger selection of programming channels for display on the respective passenger video display, the method  
10 comprising:

generating a flight information channel including a moving representation of the aircraft position on a map image; and

15 permitting passenger selection of the flight information channel on the passenger video display also using the at least one passenger control unit.

42. A method according to Claim 41 wherein the satellite TV receiver comprises a direct broadcast satellite (DBS) receiver.

43. A method according to Claim 41 wherein generating the flight information channel comprises determining an aircraft position during flight.

44. A method according to Claim 41 wherein generating the flight information channel comprises determining at least one of an aircraft direction, aircraft speed and aircraft altitude for display with  
5 the moving map image.

45. A method according to Claim 41 wherein  
the aircraft in-flight entertainment system further  
comprises a global positioning system (GPS) receiver;  
and wherein generating the flight information channel  
5 comprises determining aircraft position based on  
signals from the GPS receiver.

46. A method according to Claim 41 wherein  
the at least one passenger video display comprises a  
plurality of passenger seatback video displays.

47. A method according to Claim 41 wherein  
the aircraft is a narrow-body aircraft having a single  
passenger aisle.

**AIRCRAFT IN-FLIGHT ENTERTAINMENT  
SYSTEM WITH SOFT FAIL AND FLIGHT  
INFORMATION FEATURES AND ASSOCIATED METHODS**

**Abstract of the Disclosure**

An aircraft in-flight entertainment system preferably includes, in one embodiment, a satellite TV receiver, at least one passenger video display

5 connected to the receiver, and a processor connected to the receiver for determining an undesired condition and for generating a substitute image on the passenger video display rather than permit display of an undesired image which would otherwise be produced. The

10 undesired condition may relate to a weak signal or component malfunction. Accordingly, the undesired image may be an undesired default text message or a degraded picture image. Other embodiments of the in-flight entertainment system are directed to providing a

15 moving map image flight information channel integrated with the programming channels of the system.

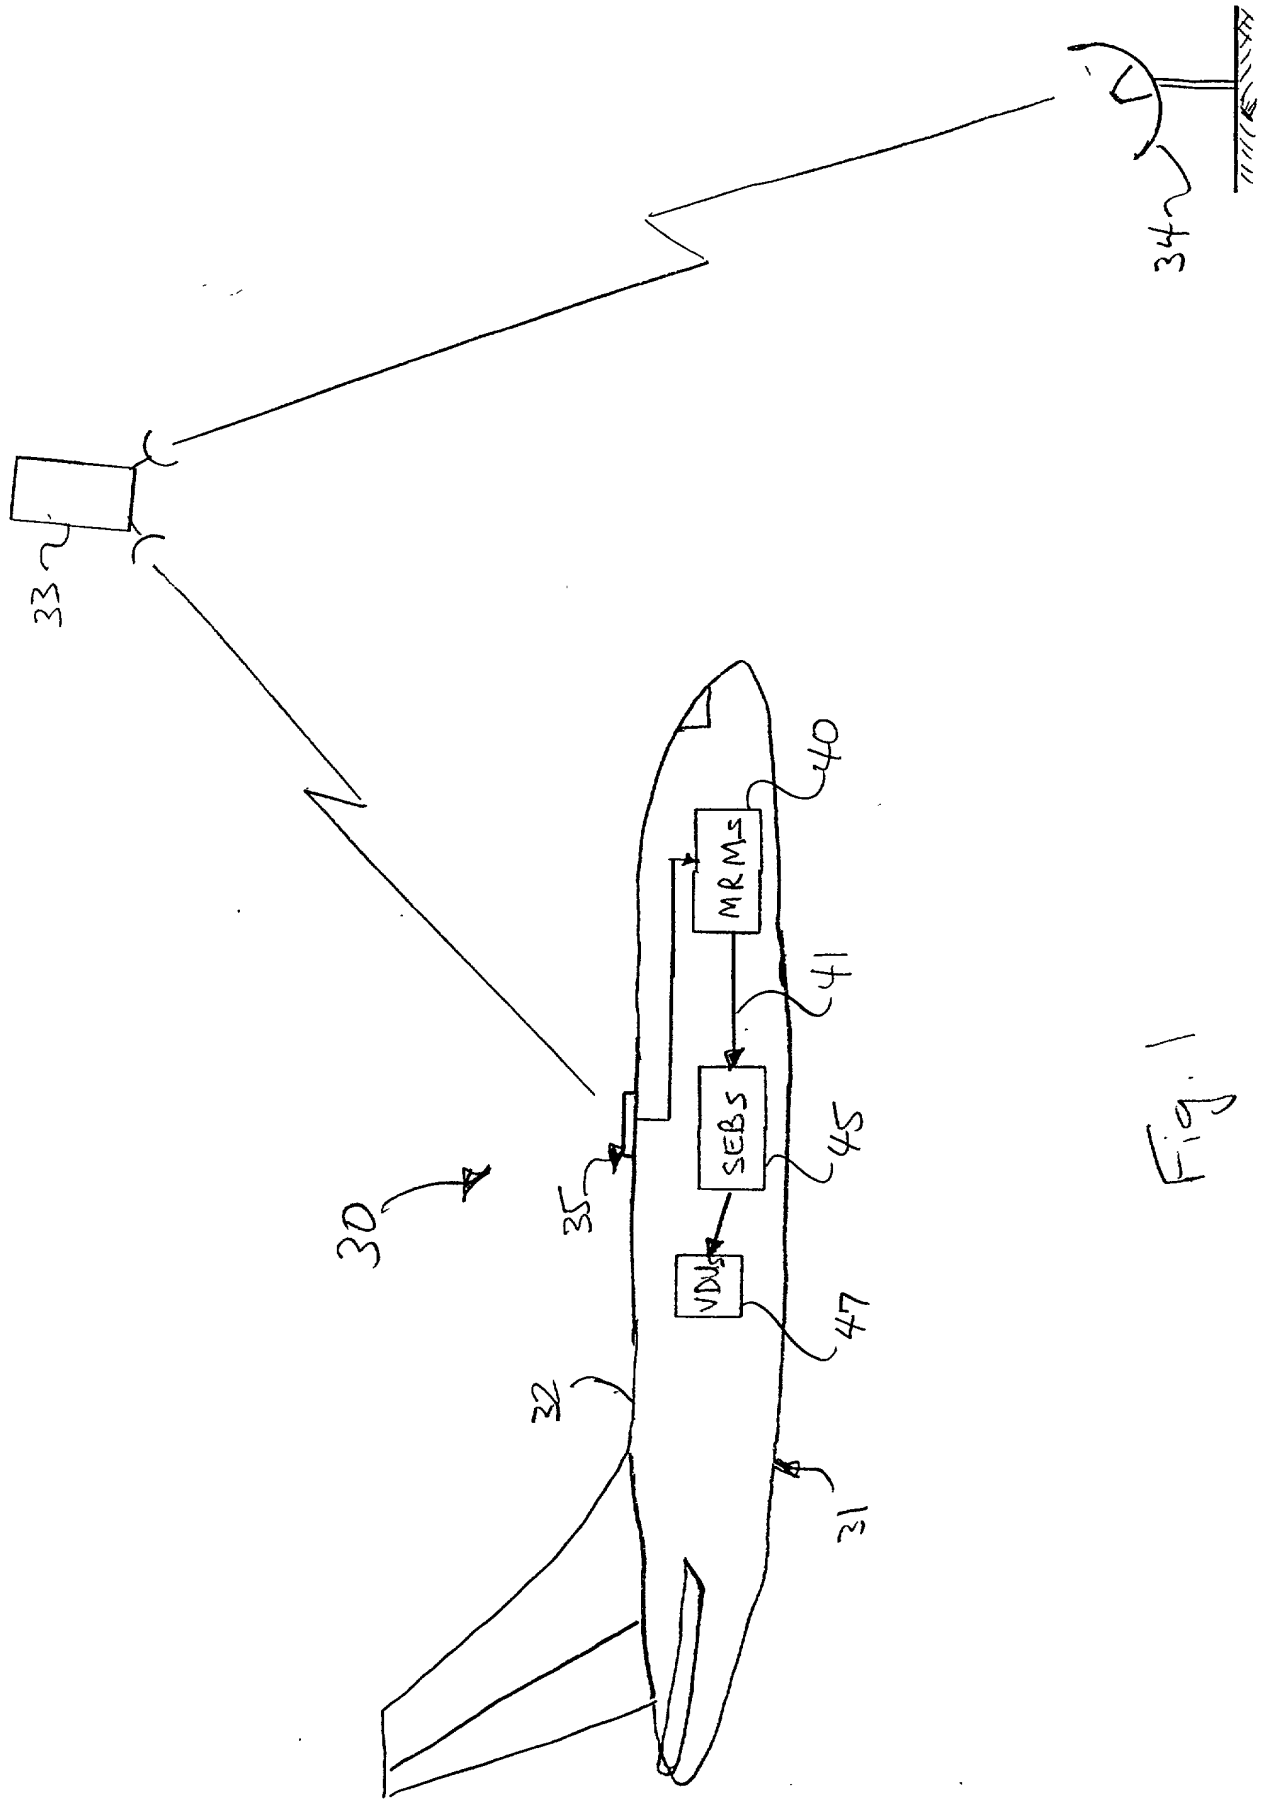


Fig. 1

30

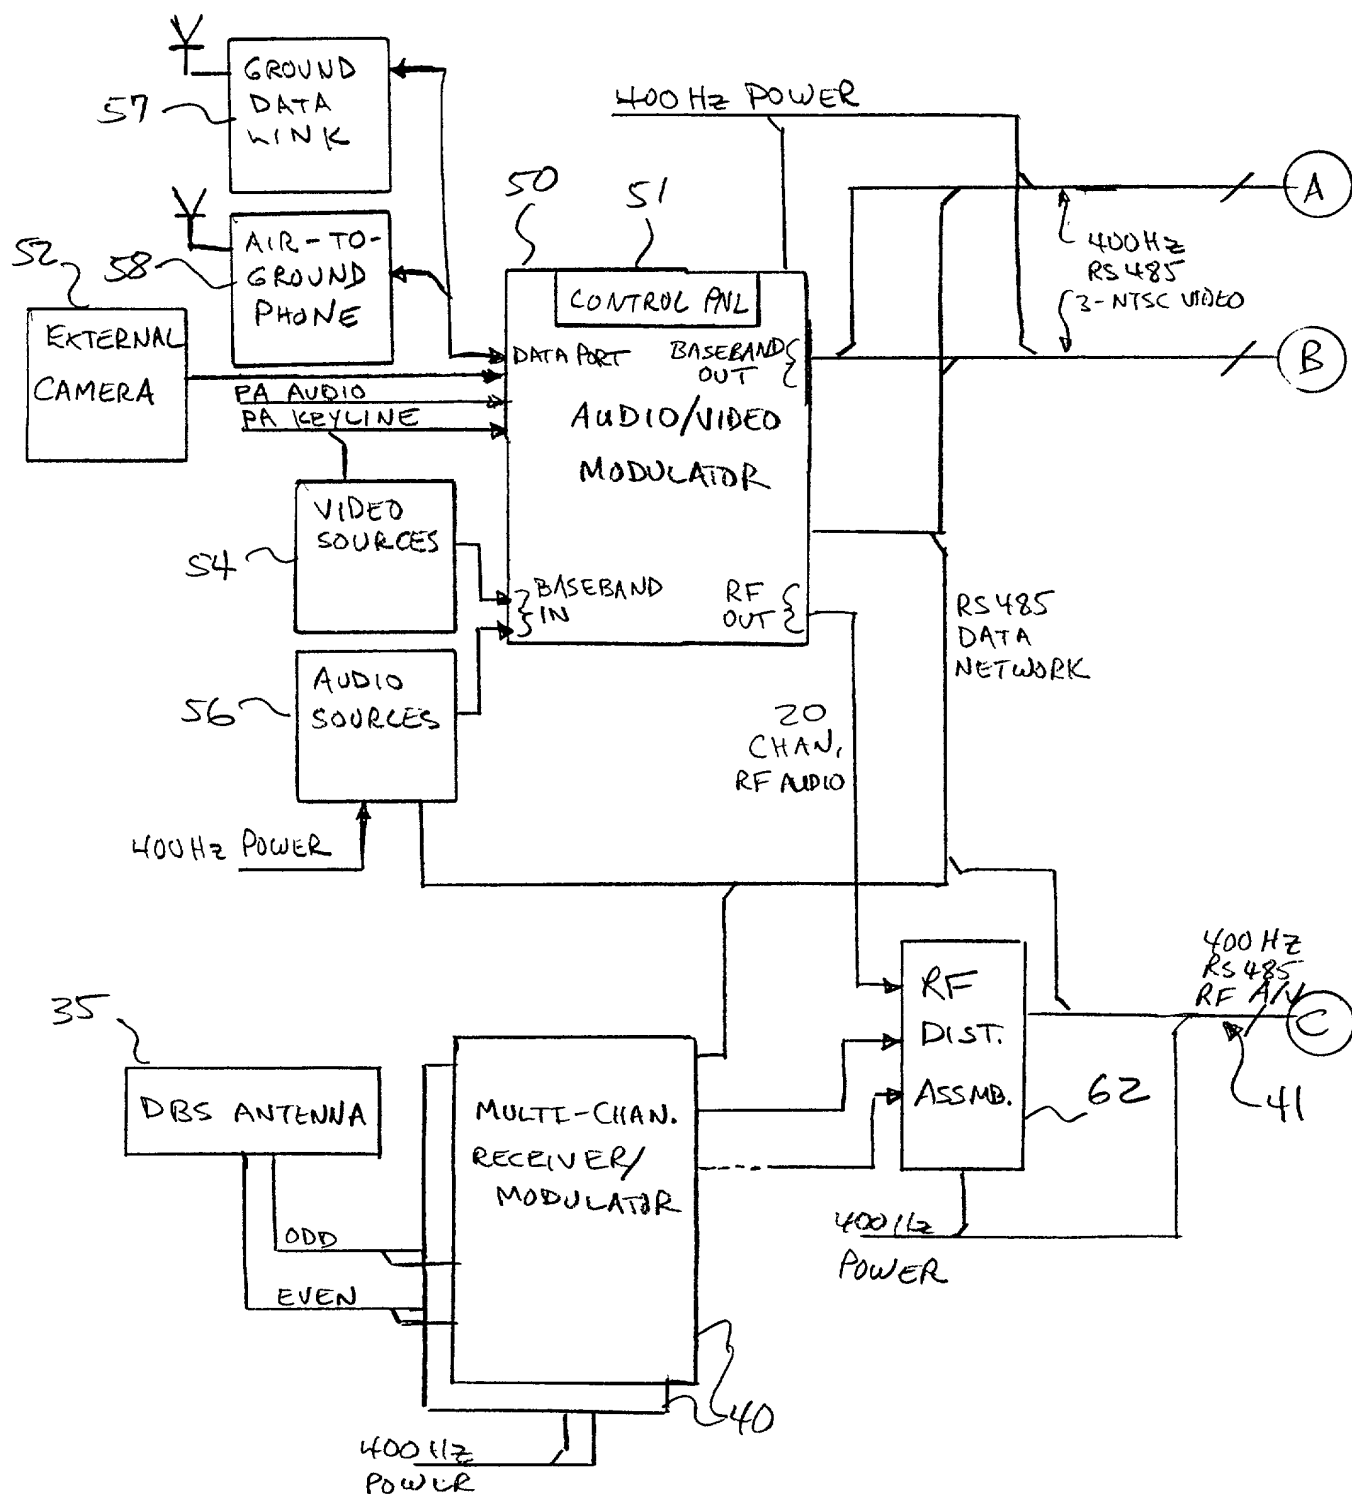


FIG. 2A



30

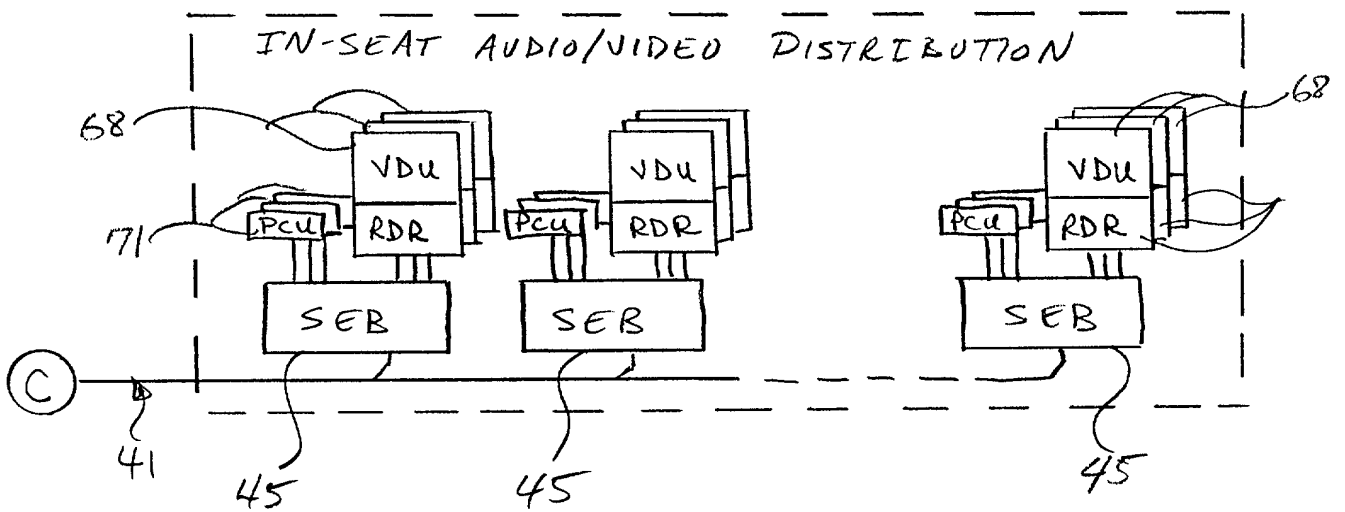
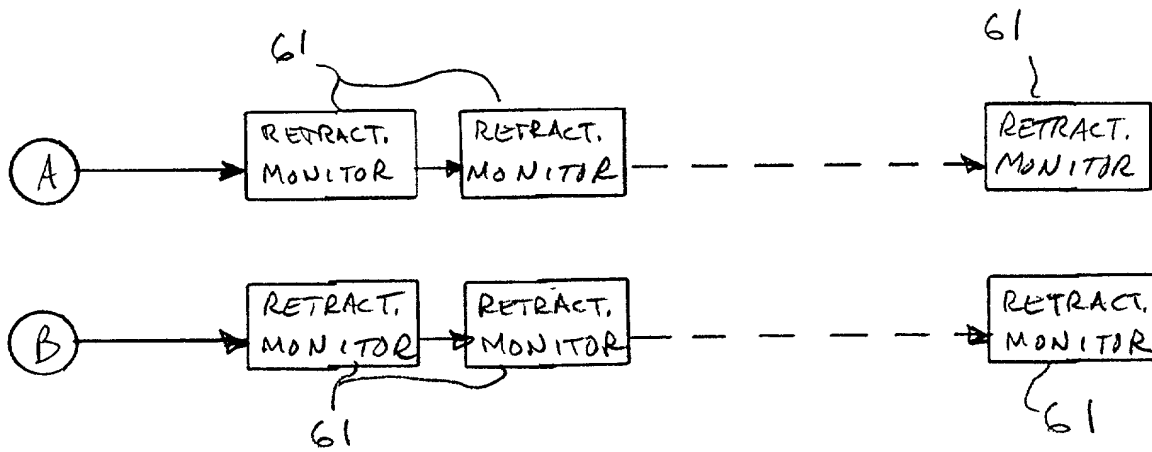


FIG. 2B

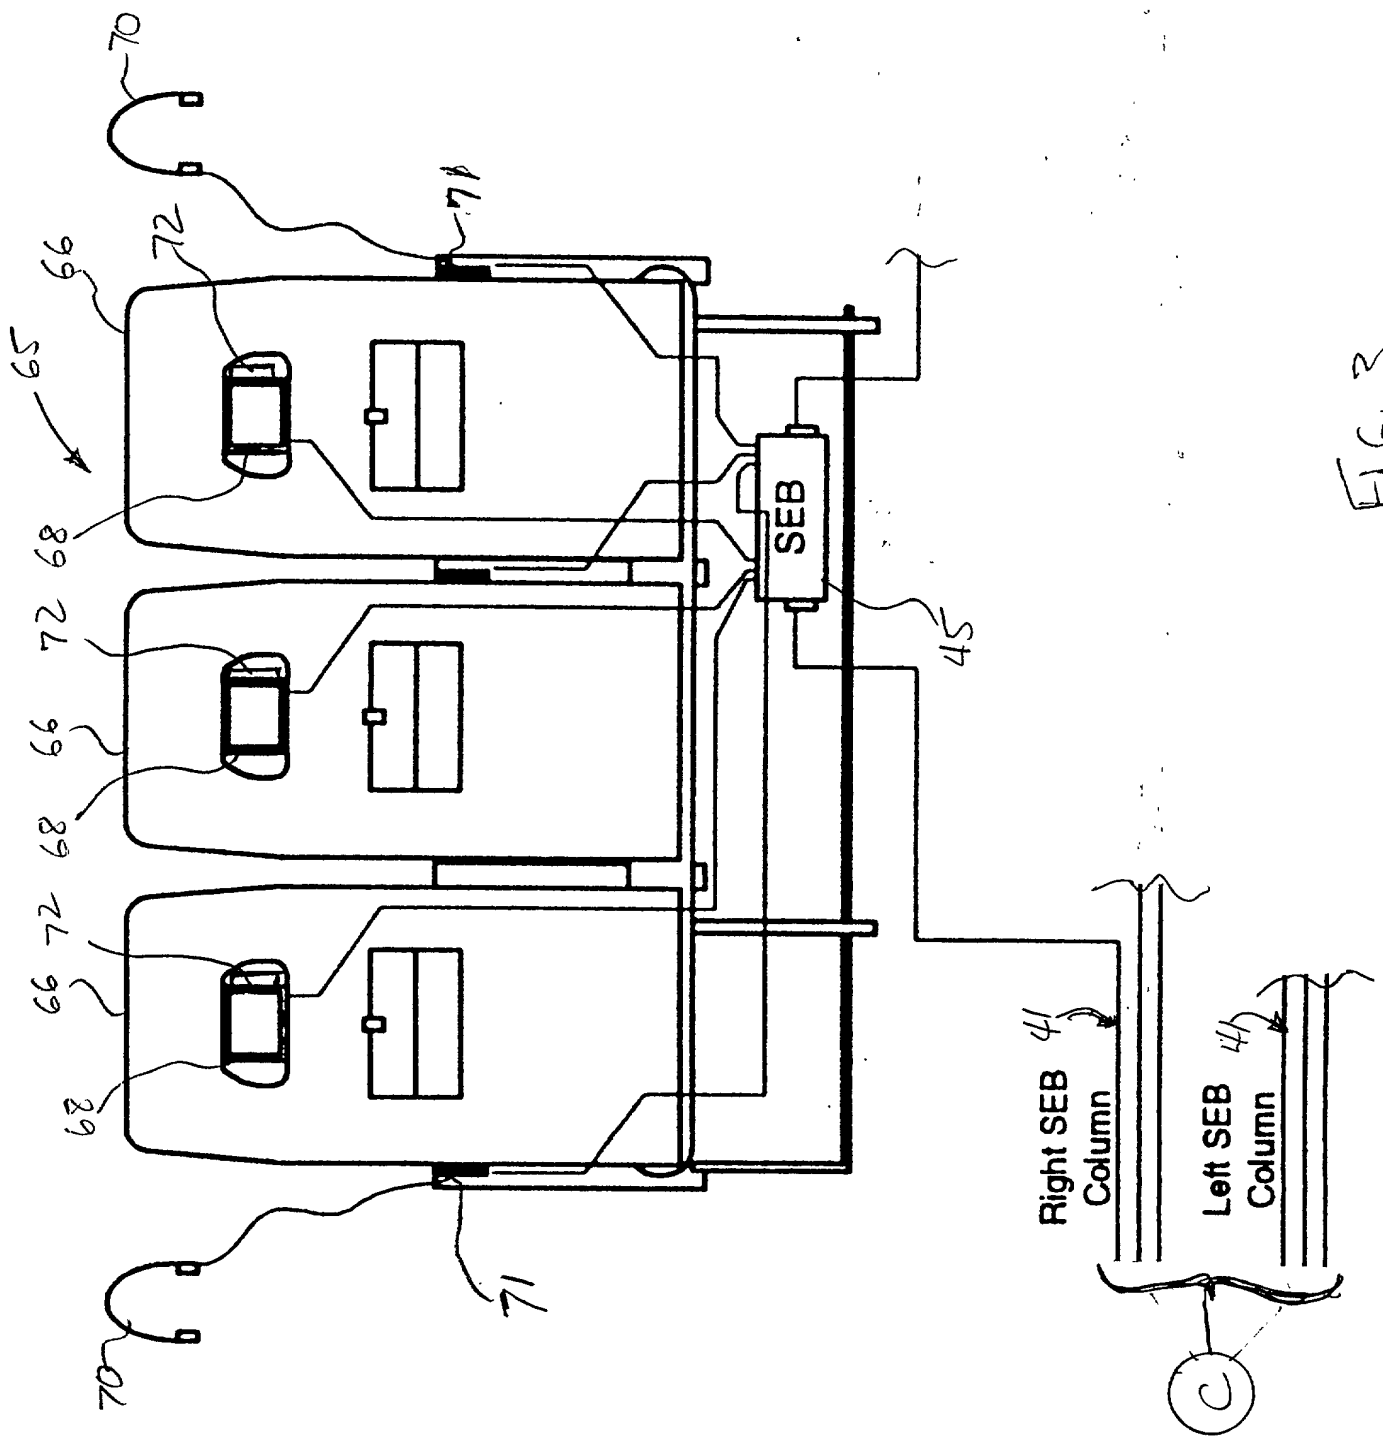


FIG. 3

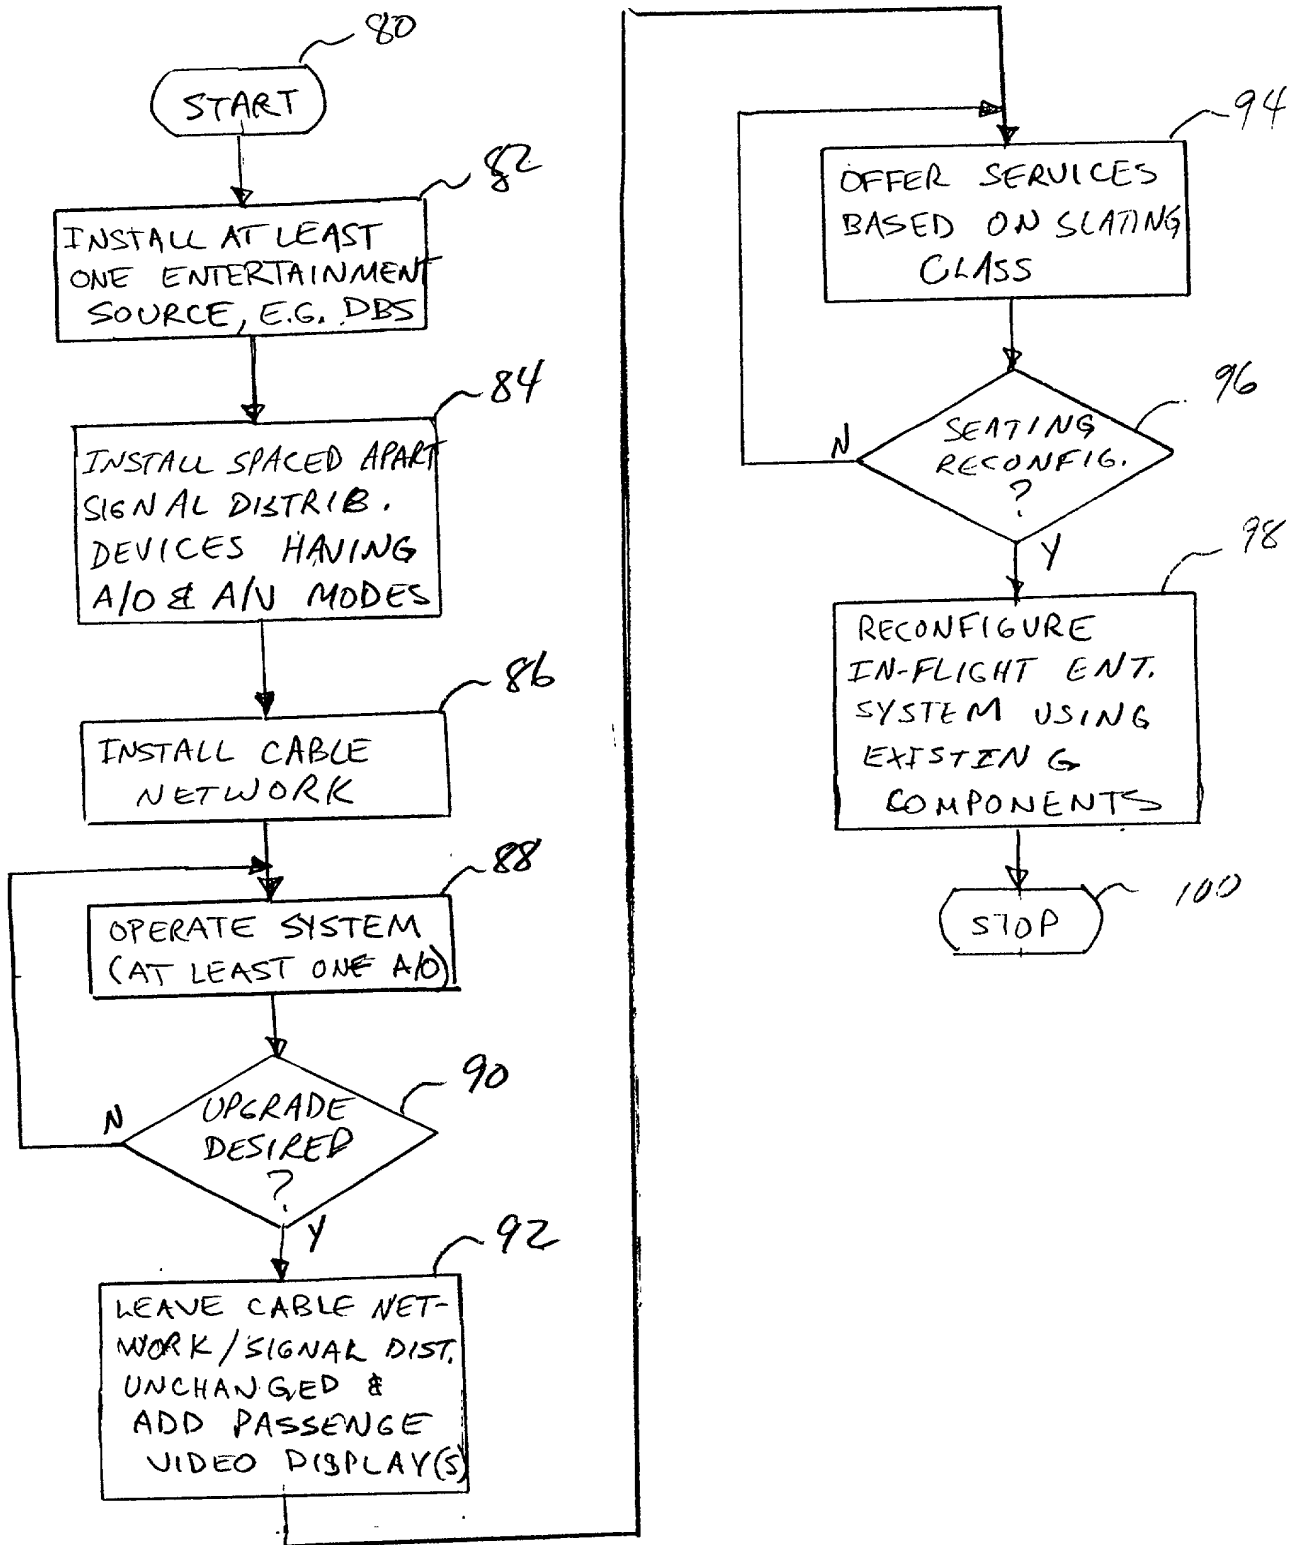


Fig. 4

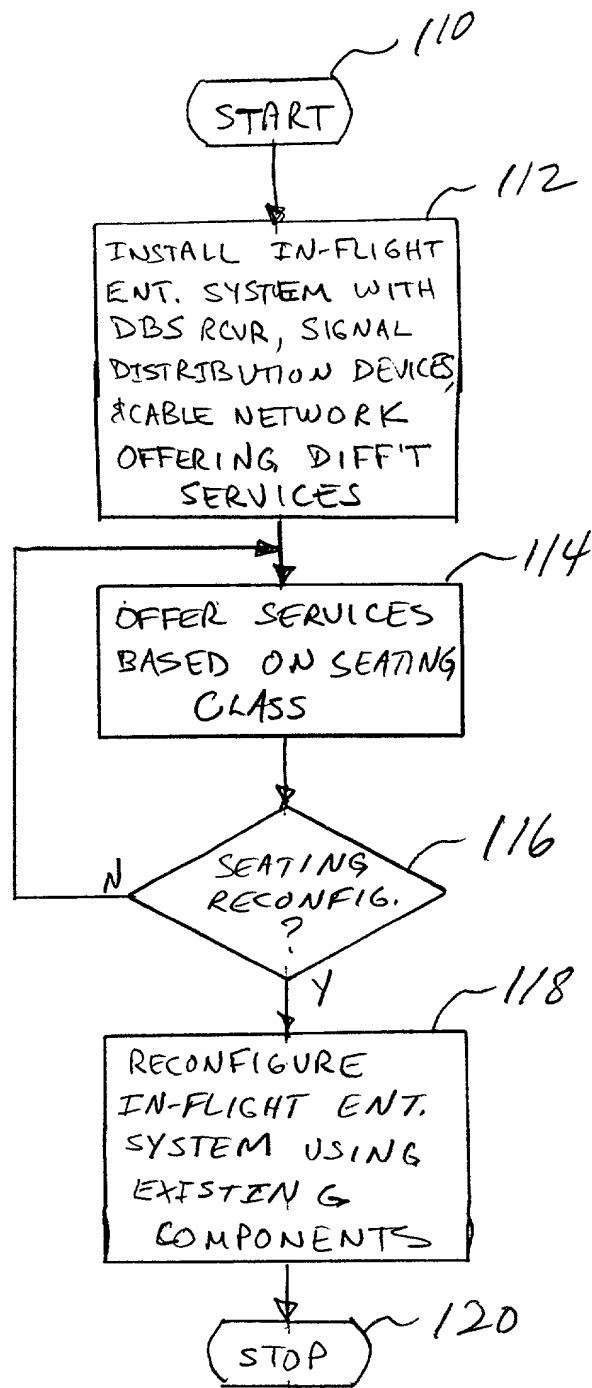


Fig. 5

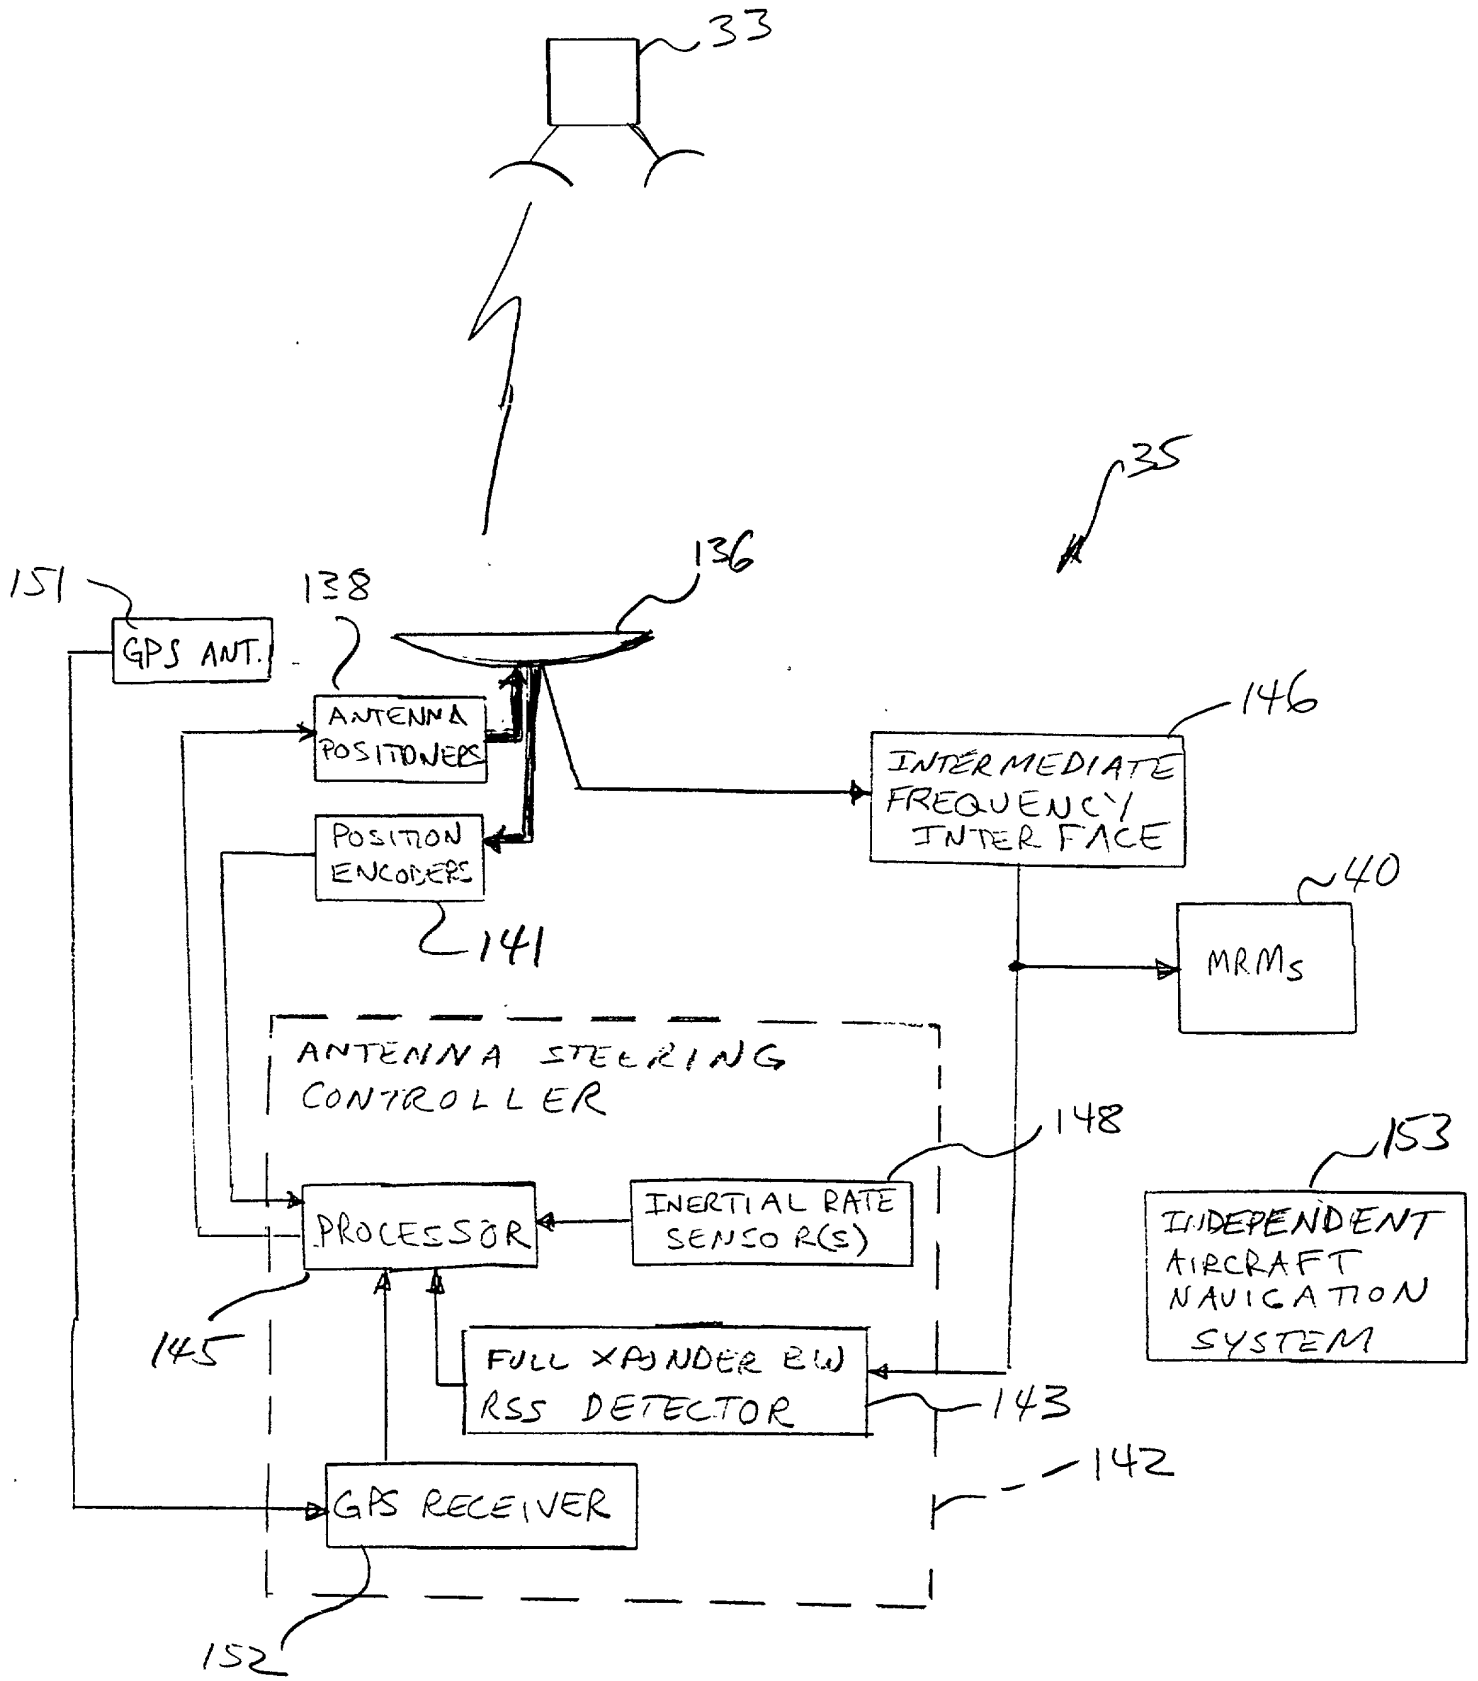


Fig. 6

35

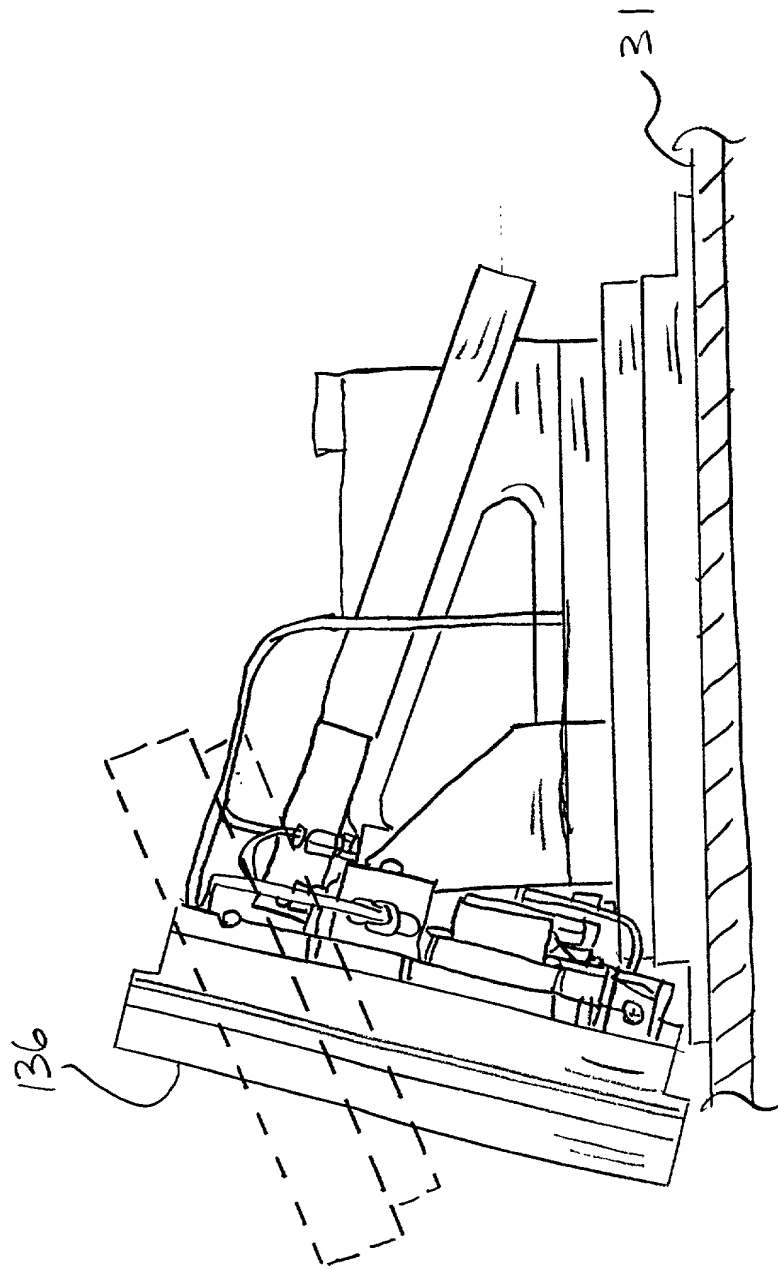


Fig. 7

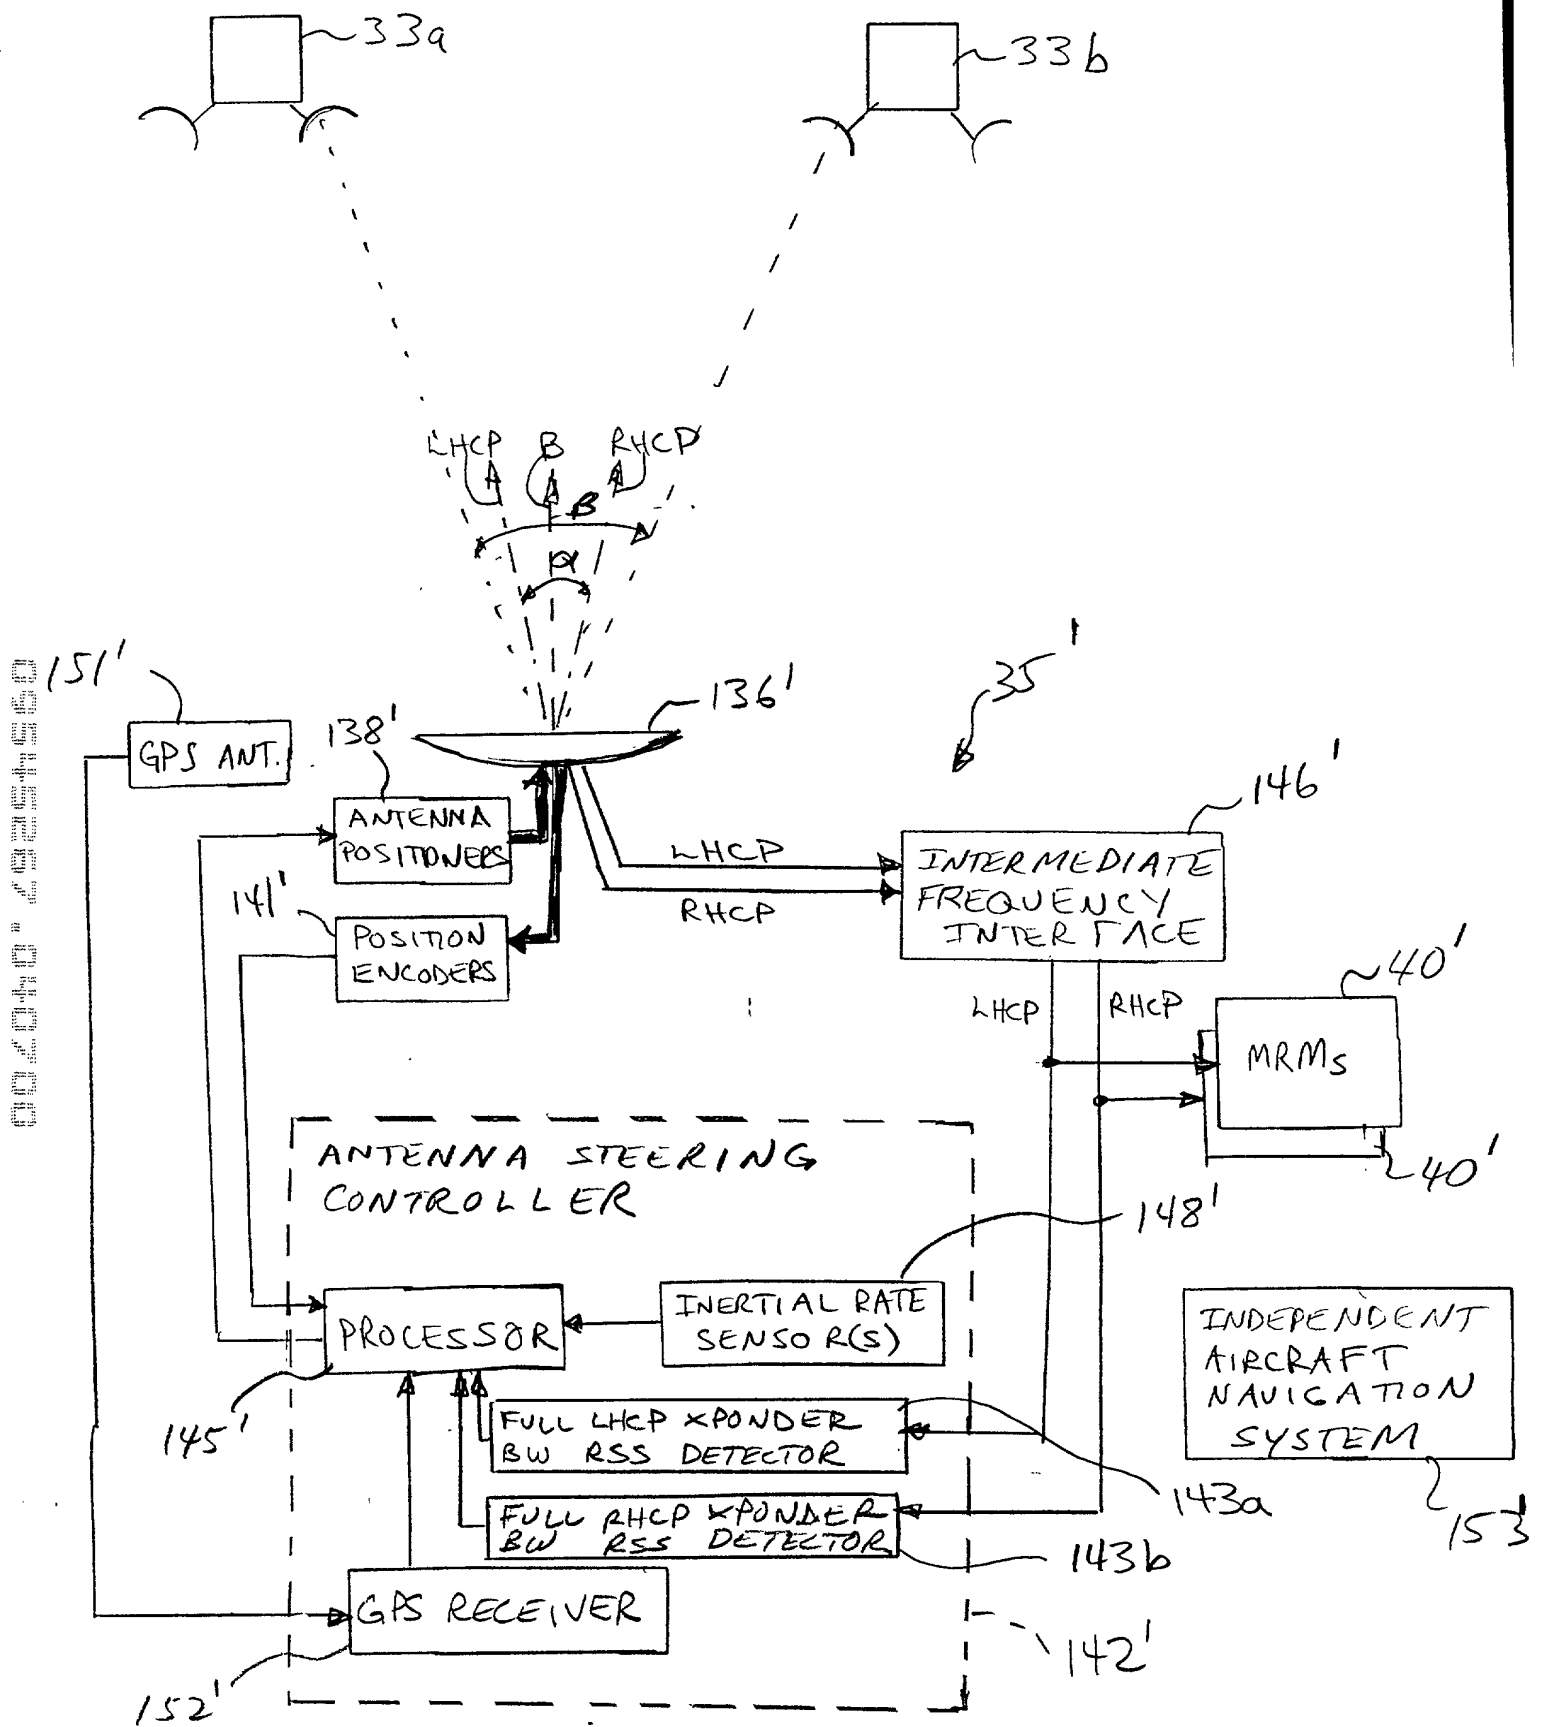


Fig. 8

30

151

# CONTROL PANEL

171

VIDEO  
CTRL

1639

AUDIO  
CTRL

1636

CABIN  
VIEW

163c


TEST

163d

AIRCRAFT TYPE  
MD-80

SELECT

SEB #4  
ZONES  
P/S FAIL

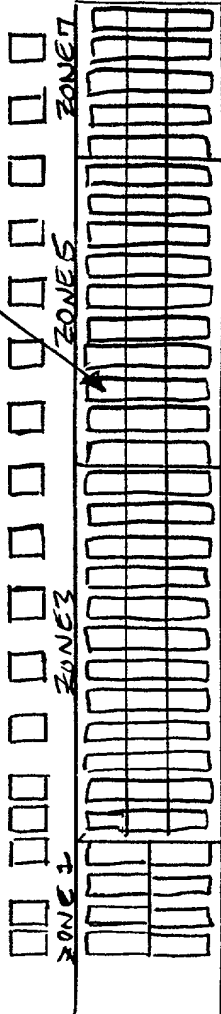

PASSENGER AISLE

AUM

VTRS

AUDIO

ZONE AMP

ZONE 2 ZONE 4 ZONE 6 ZONE 8

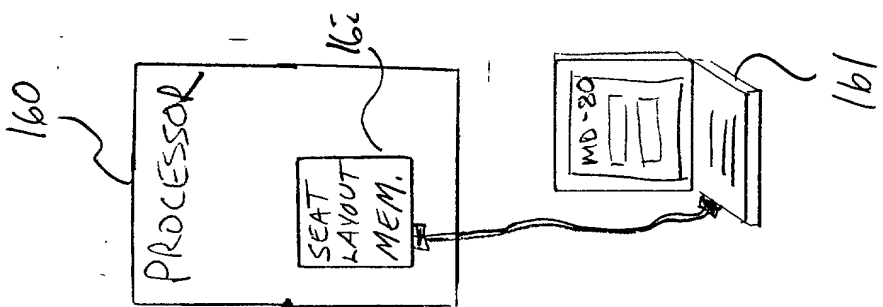


Fig. 9

170



151

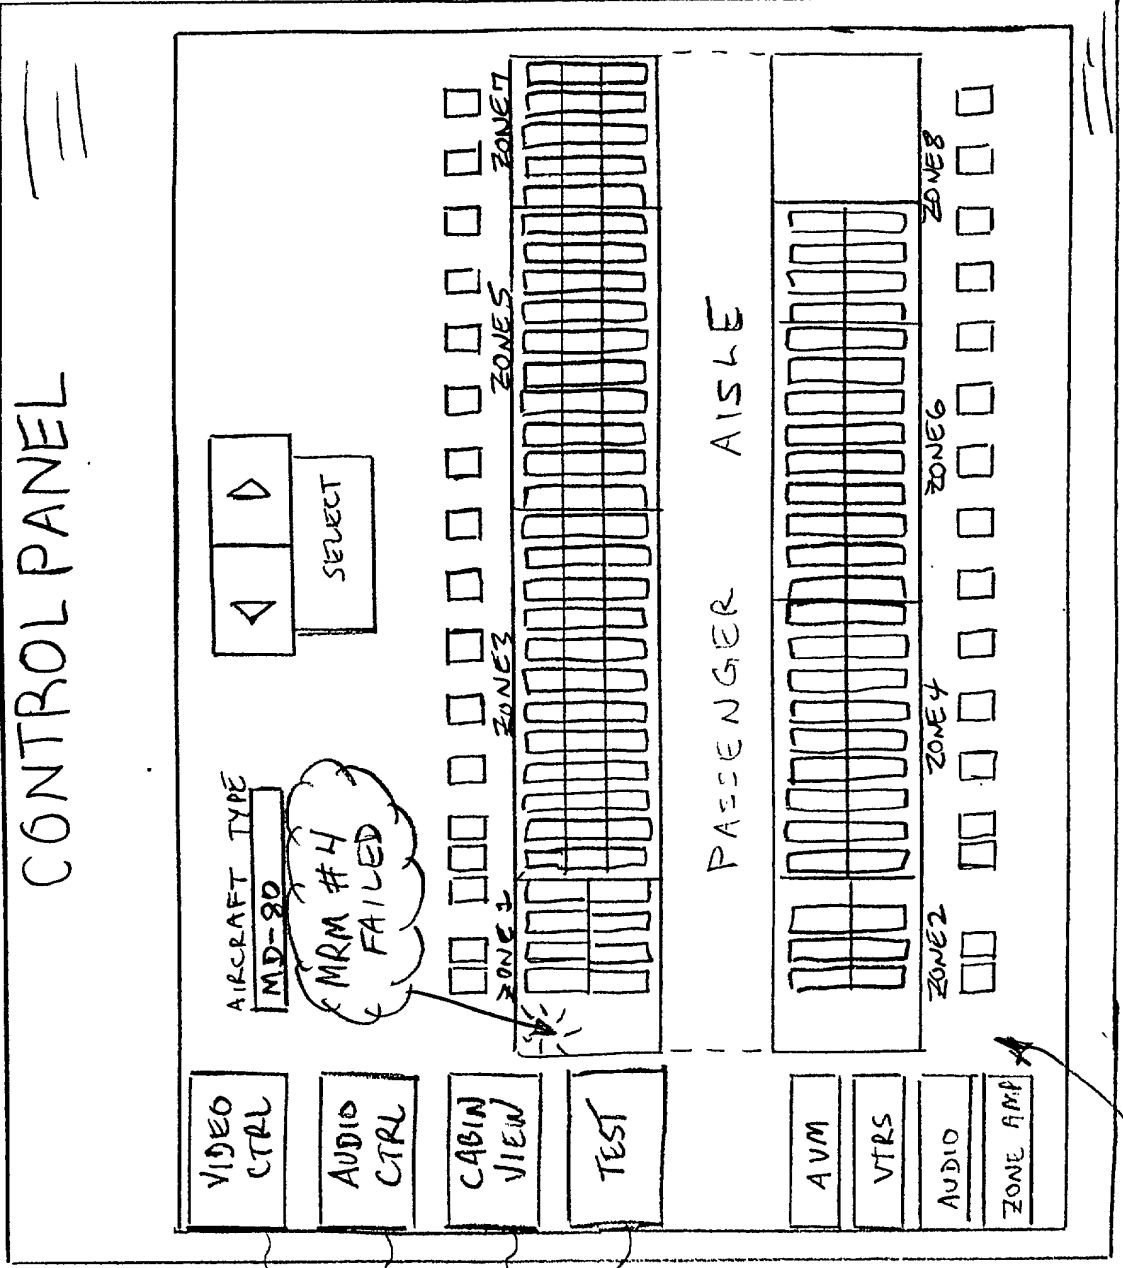


Fig. 10

170

30

51

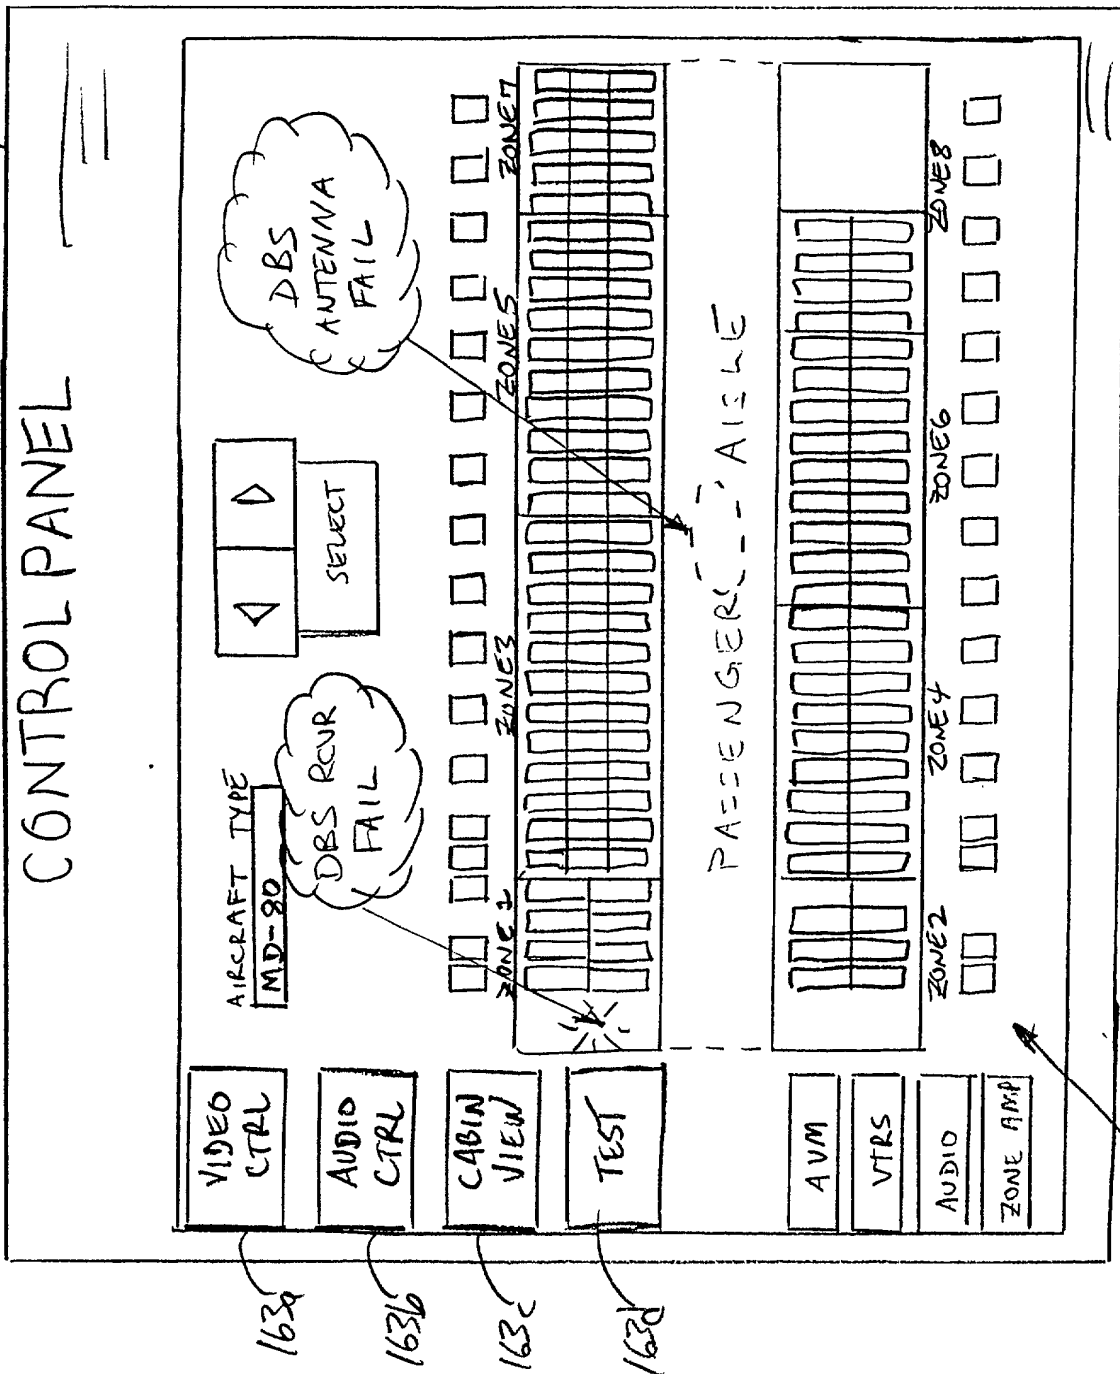


Fig. 11

30

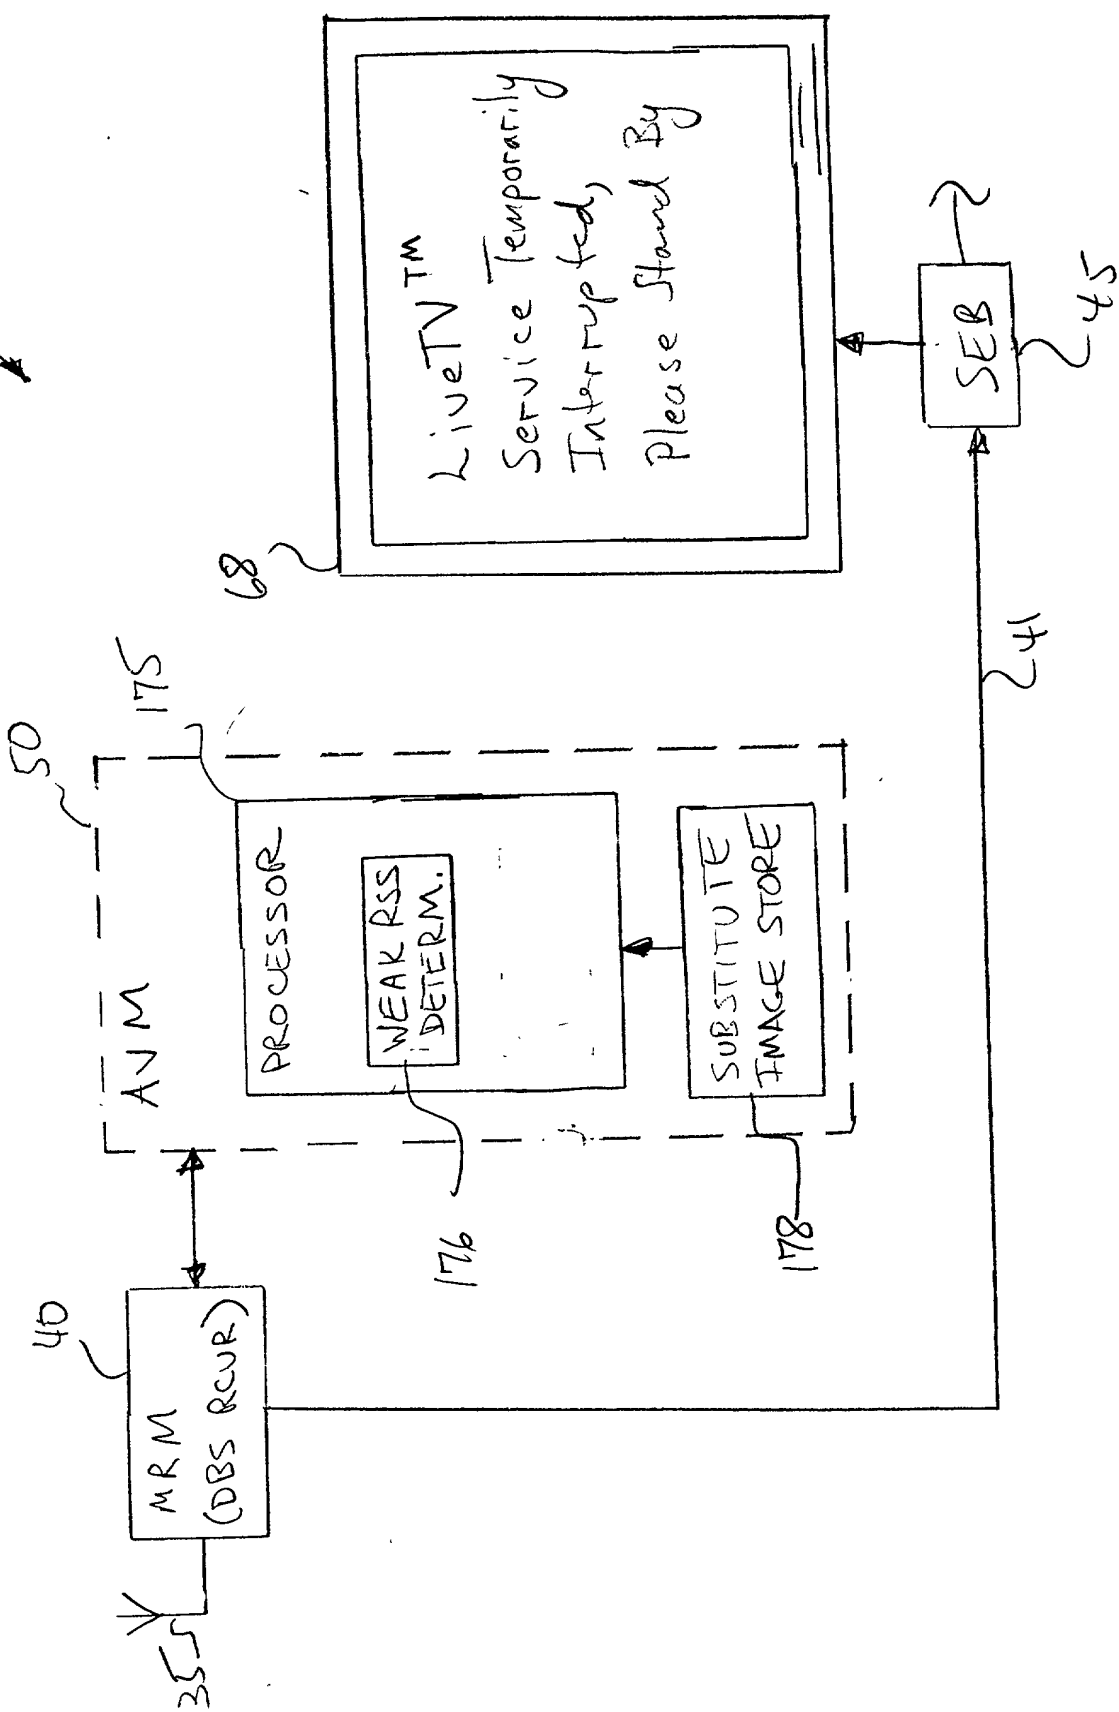


Fig. 12

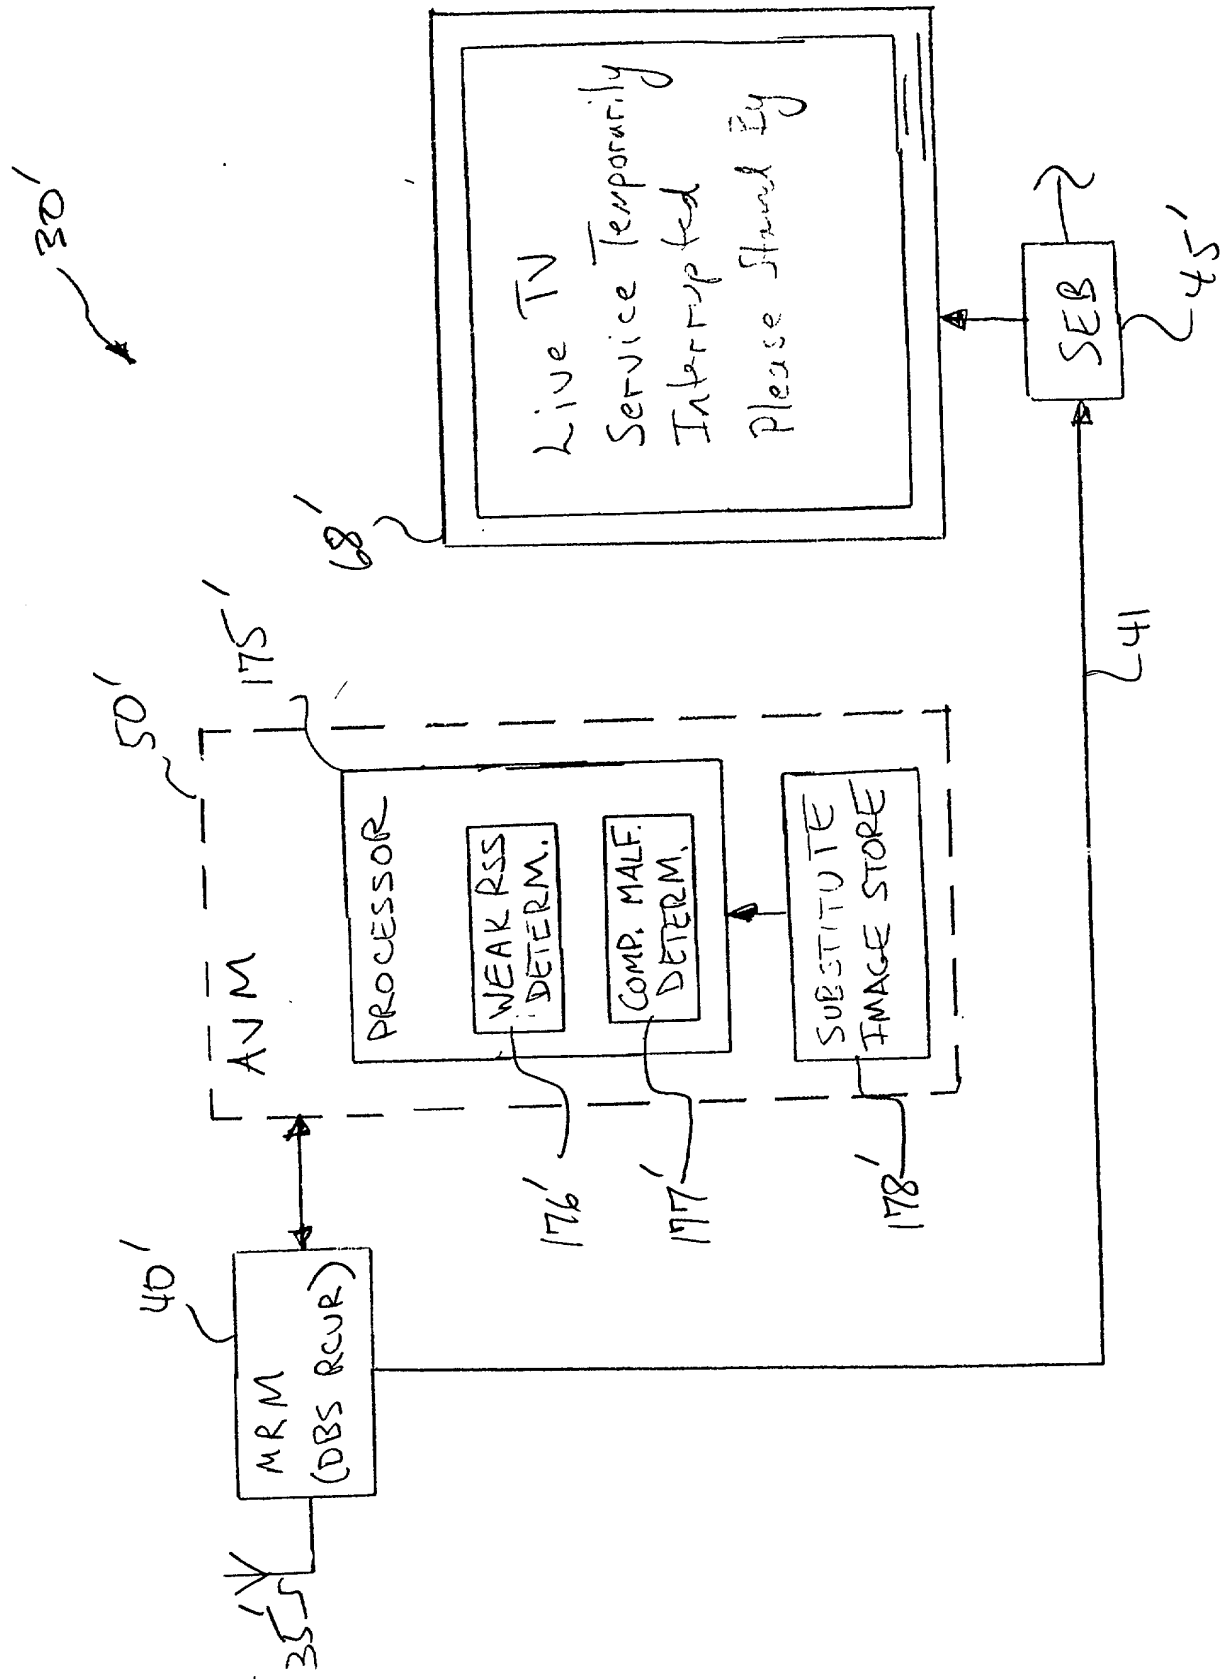


Fig. 13

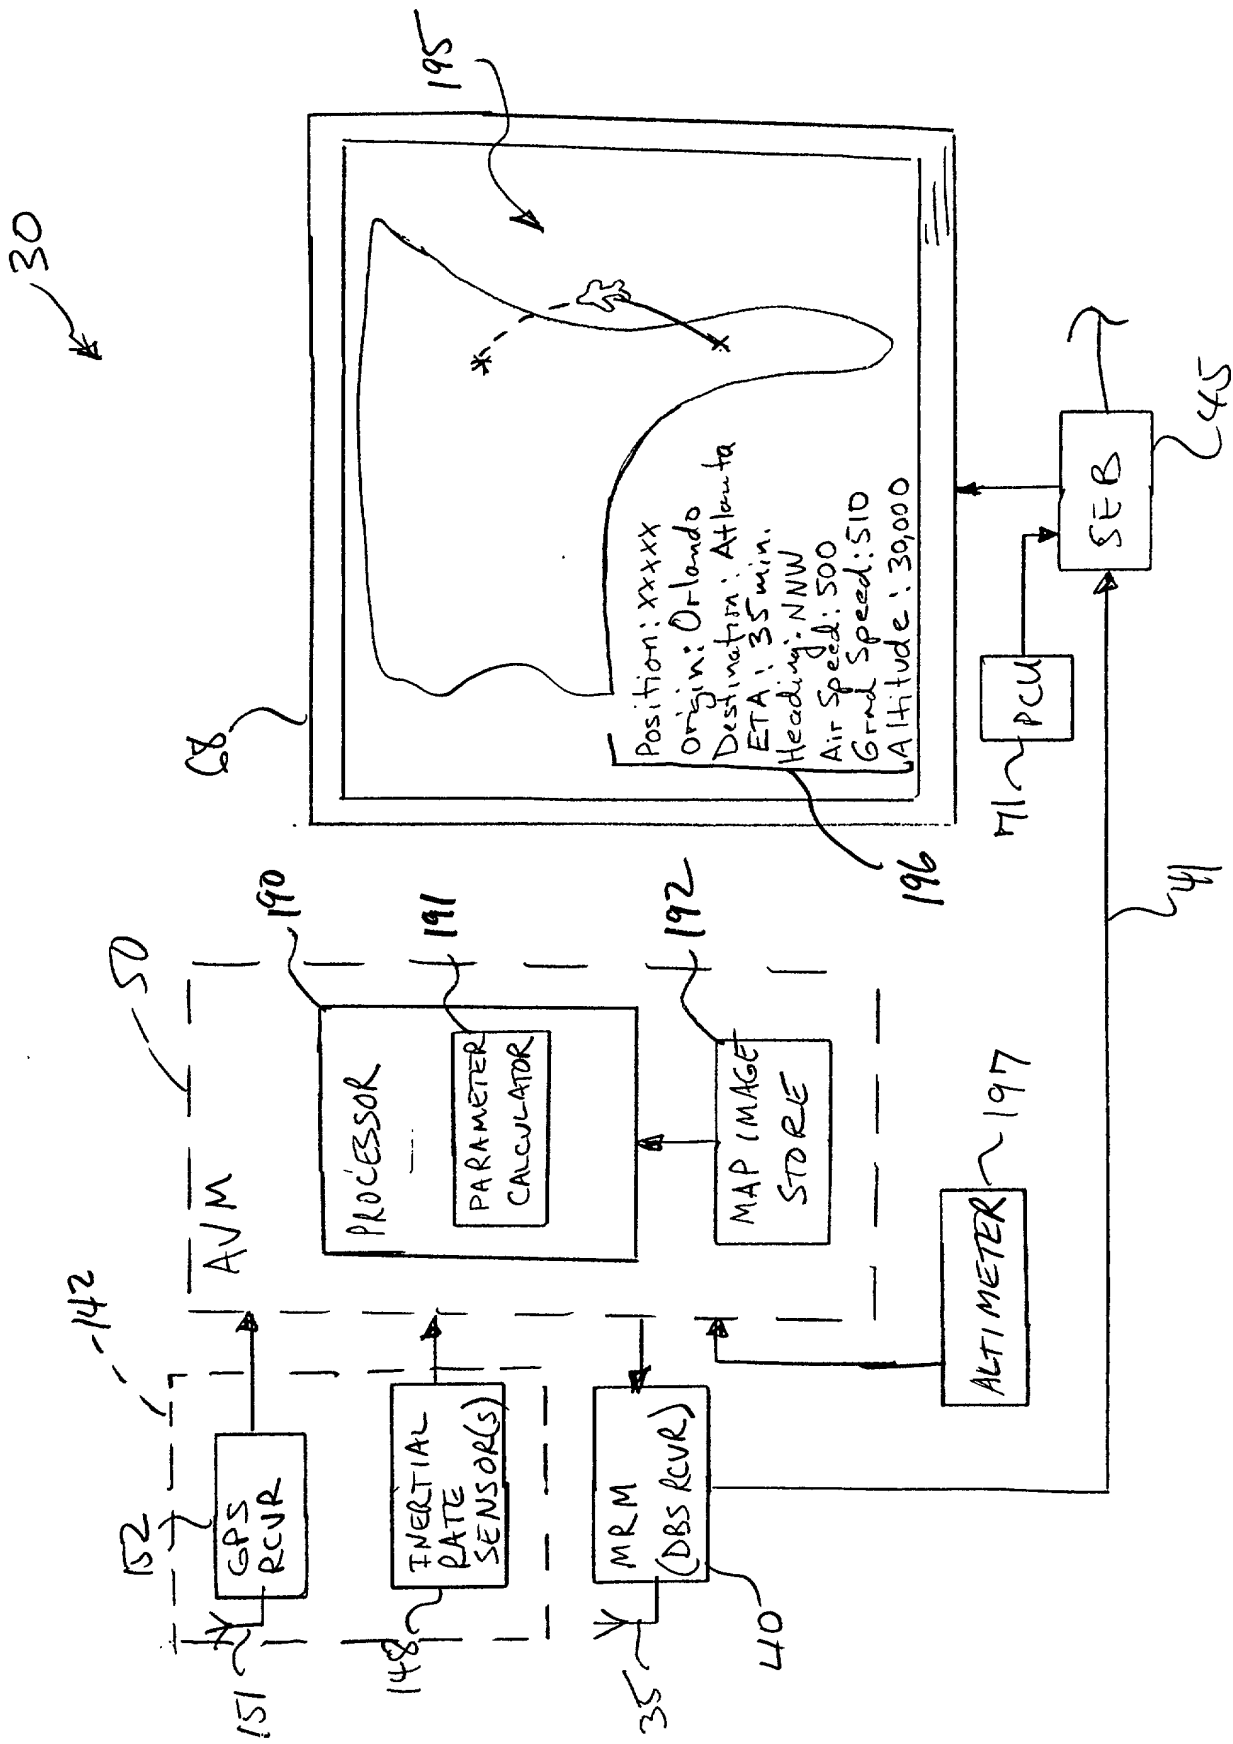


Fig. 14

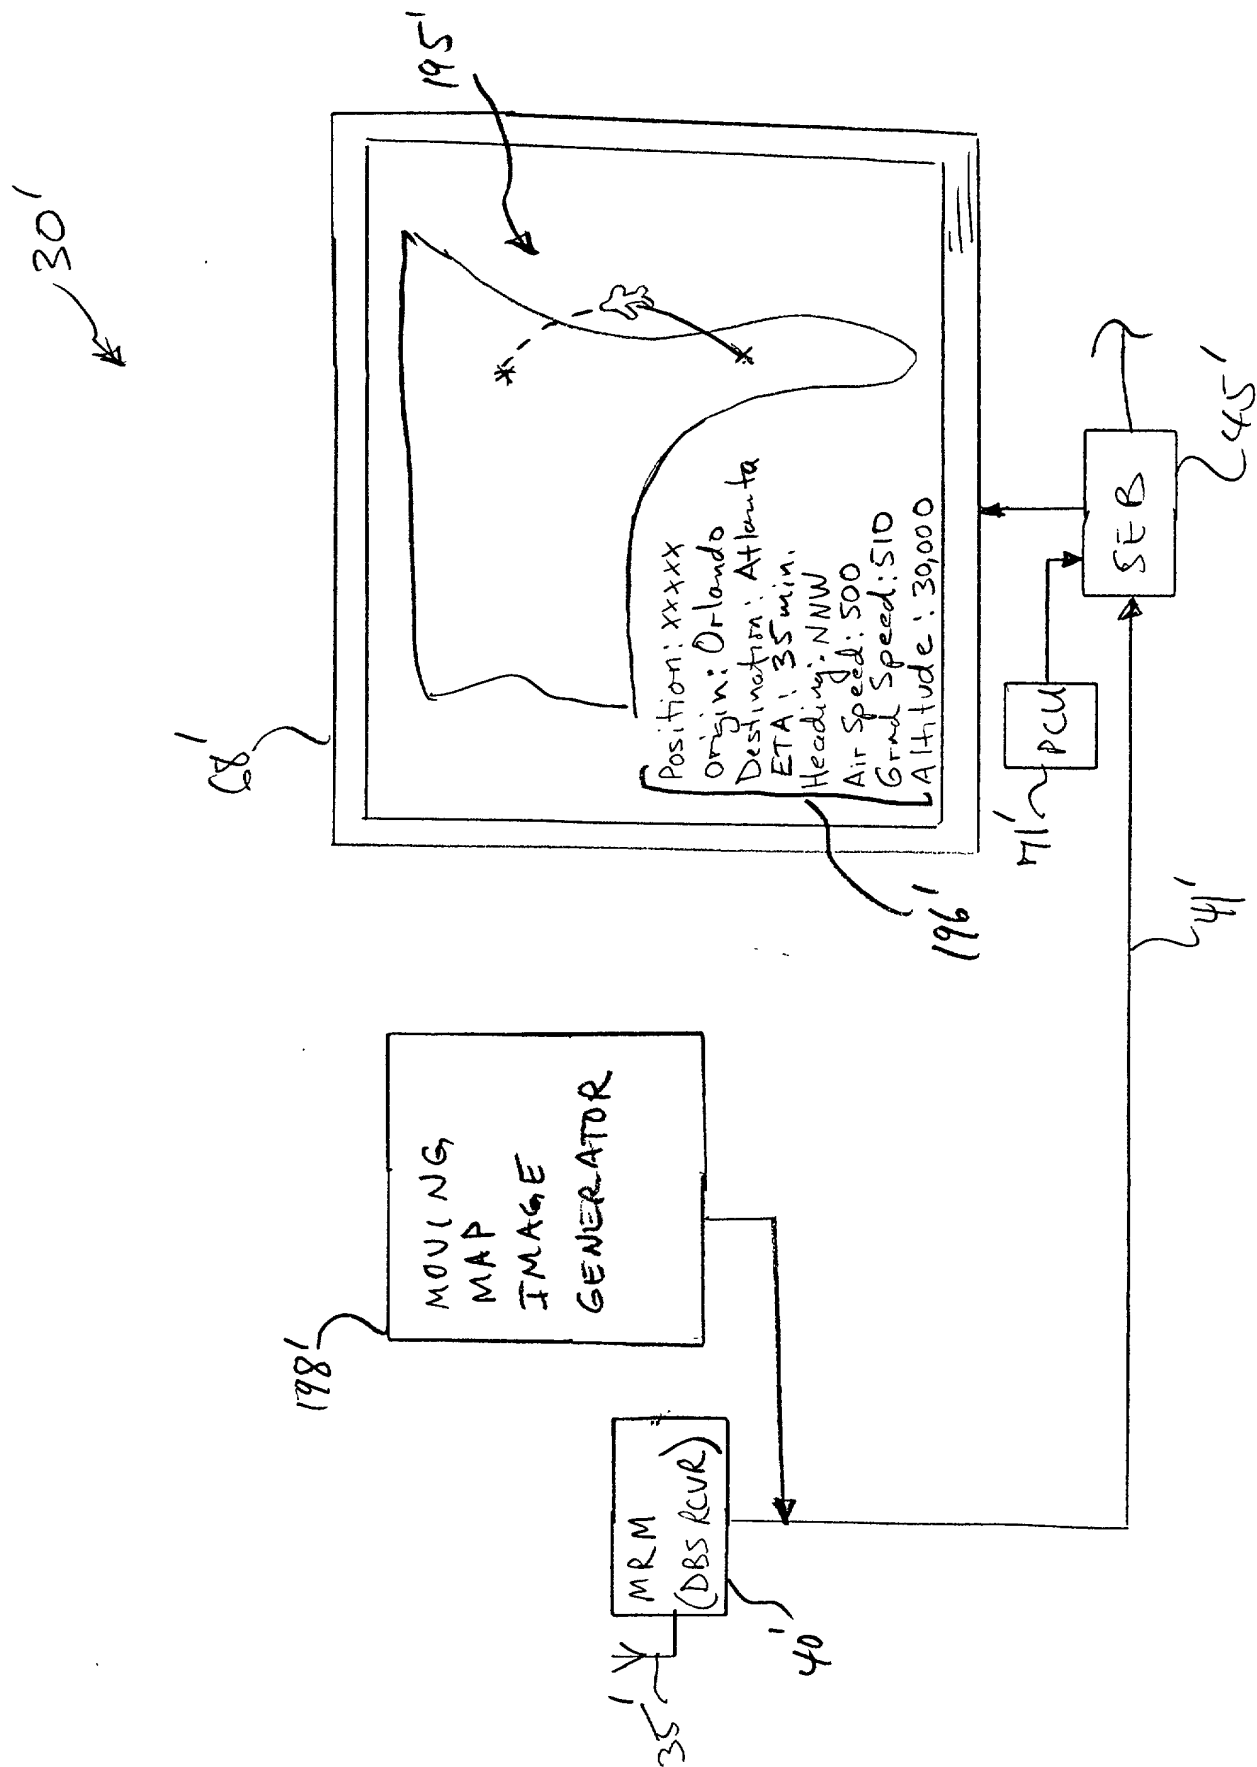


Fig. 15

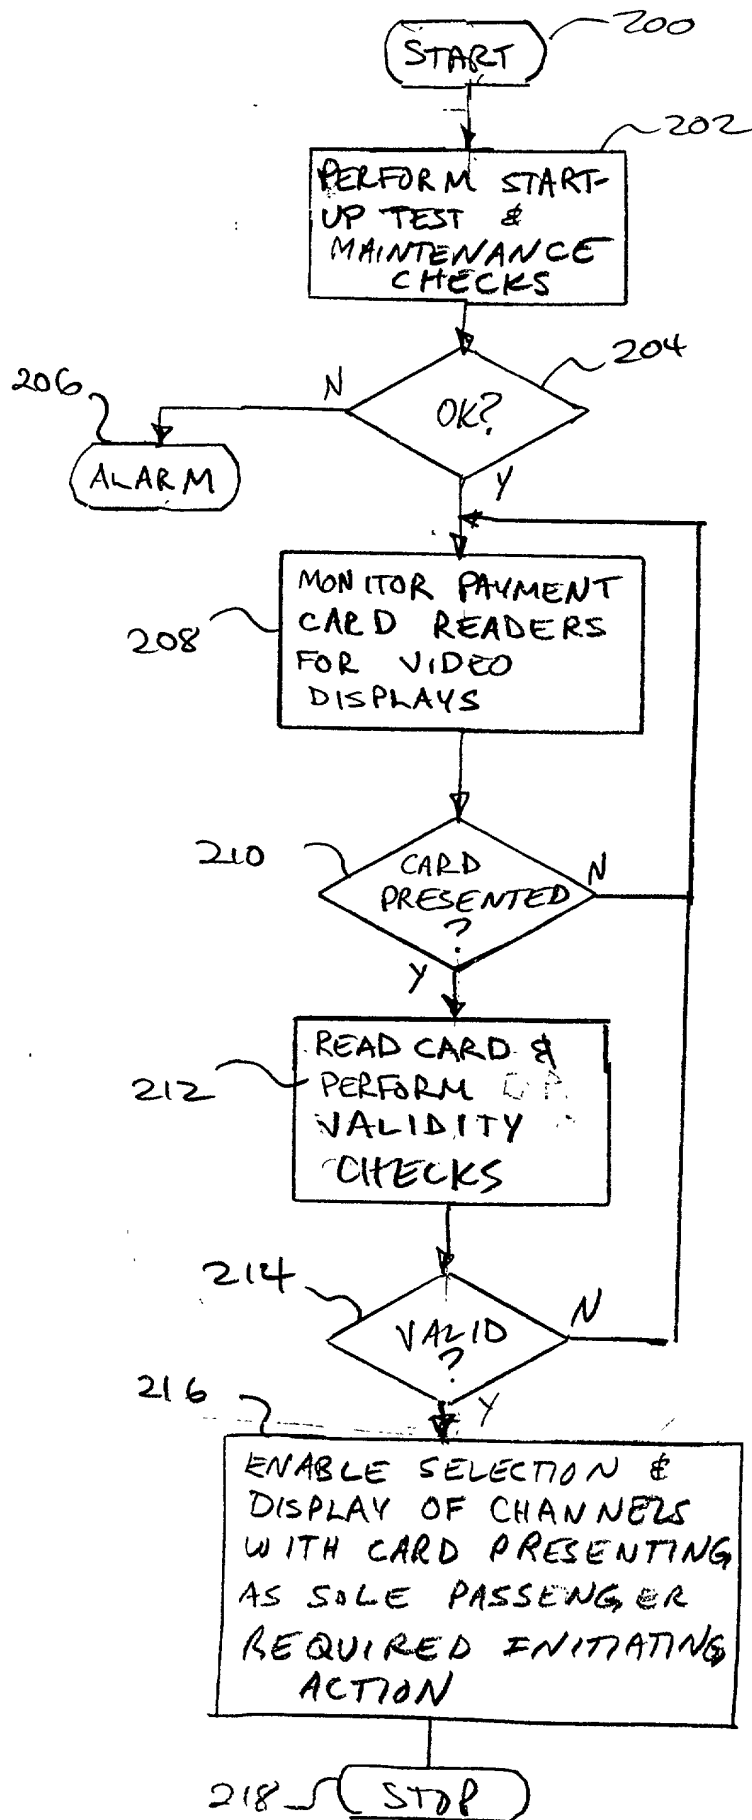


Fig. 16

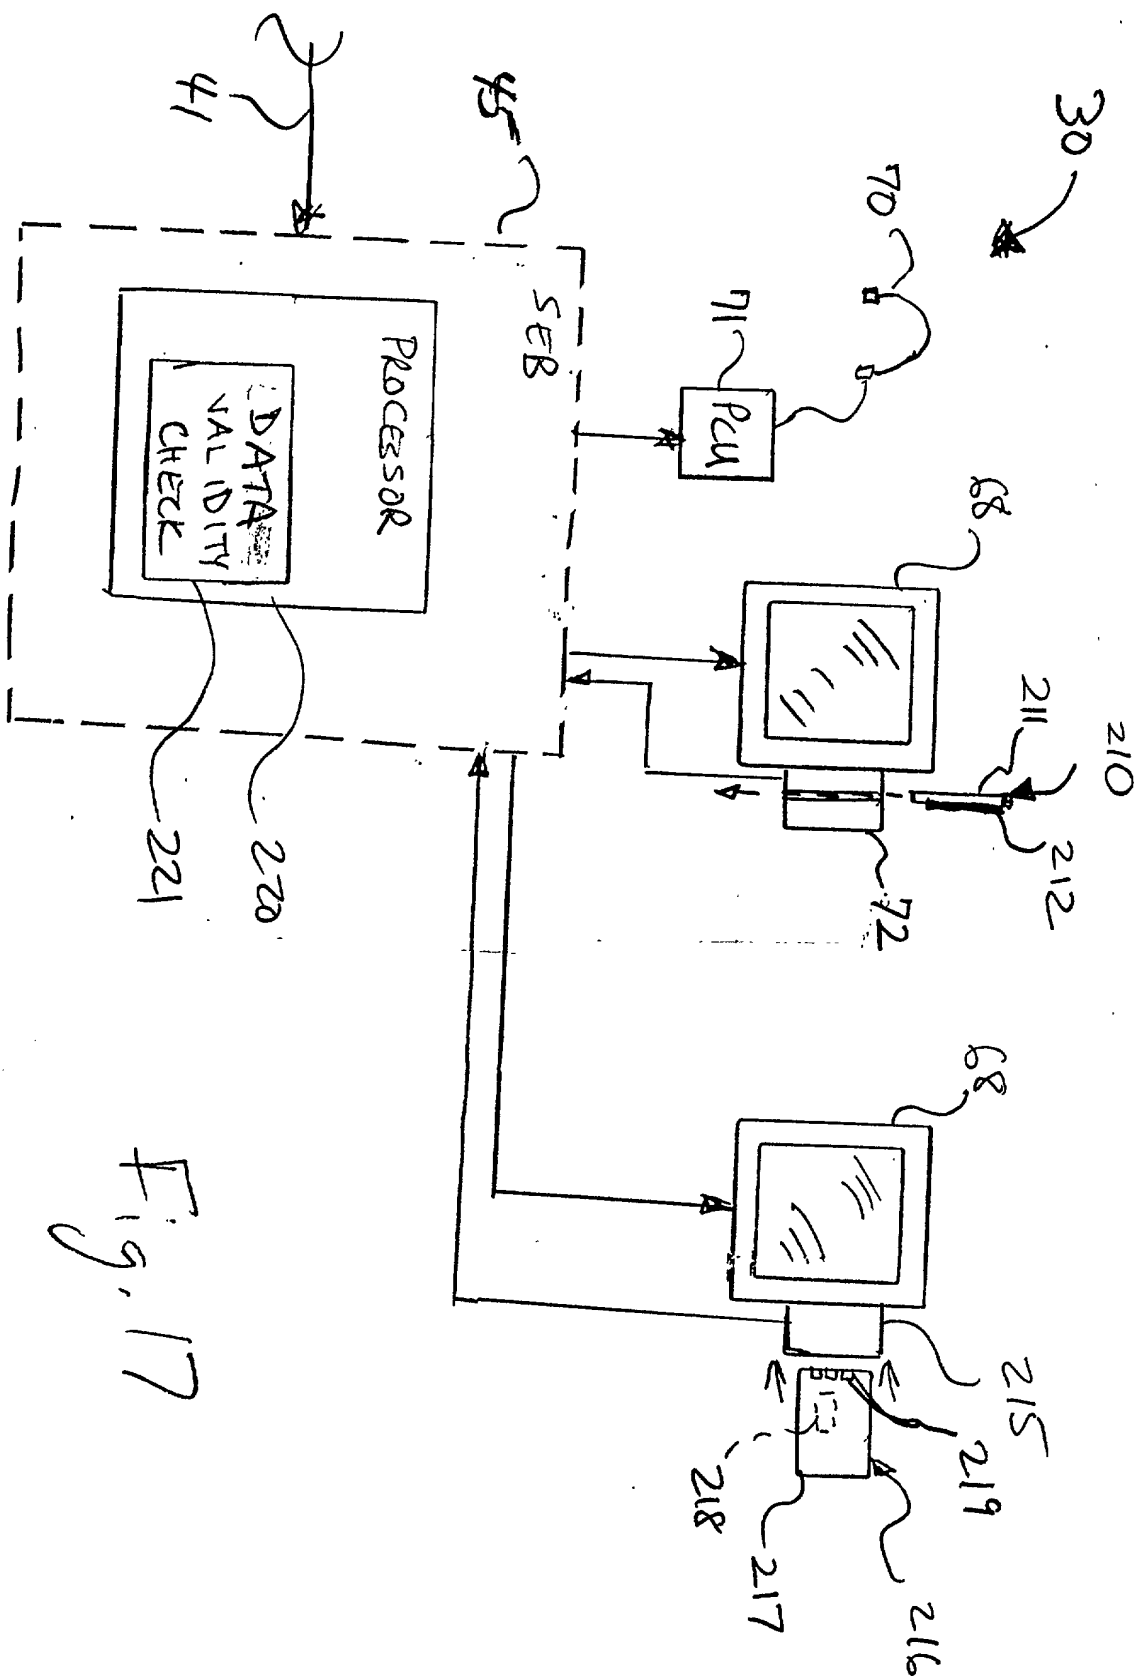


Fig. 17